

AGRICULTURE WATER DEMAND MODEL

Report for the Southern Gulf Islands

March 2015

DRAFT



**BRITISH
COLUMBIA**

Canada

AGRICULTURE WATER DEMAND MODEL

Report for the Southern Gulf Islands

Authors

Ted van der Gulik, P.Eng.

President
Partnership for Water Sustainability in BC
Abbotsford, BC

Denise Neilsen, Ph.D.

Research Scientist
Agriculture and Agri-Food Canada
Pacific Agri-Food Research Centre
Summerland, BC

Ron Fretwell

Program Developer
RHF Systems Ltd.
Kelowna, BC

Stephanie Tam, P.Eng.

Water Management Engineer
B.C. Ministry of Agriculture
Sustainable Agriculture Management Branch
Abbotsford, BC



March 2015

DISCLAIMER

Agriculture and Agri-Food Canada, the BC Ministry of Agriculture and the Investment Agriculture Foundation of BC are pleased to participate in the delivery of this project. We are committed to working with our industry partners to address issues of importance to the agriculture and agri-food industry in British Columbia. Opinions expressed in this report are those of the authors and not necessarily those of the Investment Agriculture Foundation or Agriculture and Agri-Food Canada.

The data that is presented in this report provides the best estimates for agriculture water demand that can be generated at this time. While every effort has been made to ensure the accuracy and completeness of the information, the information should not be considered as final. The Government of Canada, the BC Ministry of Agriculture, the Partnership for Water Sustainability of BC, and the BC Agriculture Council or its directors, agents, employees, or contractors will not be liable for any claims, damages, or losses of any kind whatsoever arising out of the use of, or reliance upon, this information.

Table of Contents

ACKNOWLEDGEMENTS.....	6
BACKGROUND	7
METHODOLOGY	8
Cadastre	8
Land Use Survey	9
Soil Information.....	11
Climate Information.....	12
MODEL CALCULATIONS.....	13
Crop.....	13
Irrigation.....	13
Soil	14
Climate	14
Agricultural Water Demand Equation	14
LIVESTOCK WATER USE	19
DEFINITION AND CALCULATION OF INDIVIDUAL TERMS USED IN THE IRRIGATION WATER DEMAND EQUATION	20
Growing Season Boundaries	20
Evapotranspiration (ET_o).....	22
Availability Coefficient (AC)	22
Rooting Depth (RD)	22
Stress Factor (stressFactor).....	23
Available Water Storage Capacity (AWSC).....	23
Maximum Soil Water Deficit (MSWD).....	23
Deep Percolation Factor (soilPercFactor)	23
Maximum Evaporation Factor (maxEvaporation)	24
Irrigation Efficiency (I_e)	24
Soil Water Factor (swFactor)	24
Early Season Evaporation Factor (earlyEvaporationFactor)	24
Crop Coefficient (K_c)	24
Growing Degree Days (GDD)	25
Frost Indices	25
Corn Heat Units (CHU)	25
Corn Season Start and End	26
Tsum Indices	26
Wet/Dry Climate Assessment	26
Groundwater Use.....	26

LAND USE RESULTS.....	27
AGRICULTURAL WATER DEMAND MODEL RESULTS.....	30
Annual Crop Water Demand – Tables A and B	30
Annual Water Demand Reported by Irrigation System – Table C	30
Annual Water Demand by Soil Texture – Table D	30
Annual Water Demand by Sub-Basin – Table E	31
Irrigation Management Factors – Table F	31
Deep Percolation – Table G	32
Improved Irrigation Efficiency and good Management – Table H	32
Water Demand for Frost Protection, Greenhouse and Crop Harvesting – Table I	32
Livestock Water Use – Table J	33
Climate Change Water Demand for 2050 – Table K	33
Agricultural Buildout Crop Water Demand Using 2003 Climate Data – Table L	35
Agricultural Buildout Crop Water Demand for 2050 – Table M	38
Irrigation Systems Used for the Buildout Scenario – Table N	38
Sub-Basin Water Demand for the Buildout Scenario – Table O	38
LITERATURE.....	39
APPENDIX TABLES	40

List of Figures

Figure 1	Map of ALR in SGI	7
Figure 2	Overlaid Survey Map Sheets, SGI.....	8
Figure 3	Land Use Survey	9
Figure 4	GIS Map Sheet	9
Figure 5	Cadastre with Polygons	10
Figure 6	GIS Model Graphic	11
Figure 7	SGI Area Climate Stations	12
Figure 8	Higher Productive Groundwater Aquifers in SGI	29
Figure 9	Annual ET and Effective Precipitation in 2050's.....	34
Figure 10	Future Irrigation Demand for All Outdoor Uses in the Okanagan in Response to Observed Climate Data (Actuals) and Future Climate Data Projected from a Range of Global Climate Models.....	35
Figure 11	SGI Irrigation Expansion Potential	36
Figure 12	Galiano Island Irrigation Expansion Potential.....	37
Figure 13	Pender, Mayne, and Saturna Islands Irrigation Expansion Potential.....	37
Figure 14	Small Islands Irrigation Expansion Potential	38

List of Tables

Table 1	Livestock Water Demand (Litres/day)	19
Table 2	Overview of SGI's Land and Inventoried Area	27
Table 3	Summary of Primary Agricultural Activities within the Inventoried Area where Primary Land Use is Agriculture in SGI	28
Table 4	Irrigation Management Factors	31

Acknowledgements

This project was made possible by a partnership between the Capital Regional District and the British Columbia Ministry of Agriculture. We would like to thank the farmers and residents who stopped to talk to the survey crew and/or who took the time to participate in the informational open houses.

This project was funded by Capital Regional District, the BC Ministry of Agriculture, and the Investment Agriculture Foundation of BC through programs it delivers on behalf of Agriculture and Agri-Food Canada and the British Columbia Ministry of Agriculture.

There are many people that have been involved with the preparation and collection of data used in the development of the Water Demand Model for the Southern Gulf Islands. The authors wish to express appreciation to the following for their efforts and/or in-kind contribution for the tasks noted.

PROFESSIONALS AND CONTRACTORS

Alex Cannon	Environment Canada	Climate data downscaling
Sam Lee	Ministry of Agriculture	GIS Coordination
Corrine Roesler	Ministry of Agriculture	GIS Coordination
Linda Hokanson	Ministry of Agriculture	Publication formatting
Julie Mundy	Ministry of Agriculture	Land Use Survey
Michael Dykes	Contractor	Land Use Survey
Andrea Lawseth	Contractor	Land Use Survey

IN-KIND CONTRIBUTION

The authors would like to express their gratitude to the Partnership of Water Sustainability of B.C. for their generous administration of funding for this project.



Background

The Agriculture Water Demand Model (AWDM) was originally developed in the Okanagan Watershed. It was developed in response to rapid population growth, drought conditions from climate change, and the overall increased demand for water. Many of the watersheds in British Columbia (BC) are fully allocated or will be in the next 15 to 20 years. The AWDM helps to understand current agricultural water use and helps to fulfil the Province's commitment under the "*Living Water Smart – BC Water Plan*" to reserve water for agricultural lands. The Model can be used to establish agricultural water reserves throughout the various watersheds in BC by providing current and future agriculture water use data.

Climate change scenarios developed by the University of British Columbia (UBC) and the Pacific Agri-Food Research Centre (PARC) in Summerland predict an increase in agricultural water demand due to warmer and longer summers and lower precipitation during summer months in the future.

The Agriculture Water Demand Model was developed to provide current and future agricultural water demands. The Model calculates water use on a property-by-property basis, and sums each property to obtain a total water demand for the entire basin or each sub-basin. Crop, irrigation system type, soil texture and climate data are used to calculate the water demand. Climate data from 2003 was used to present information on one of the hottest and driest years on record and 1997 data was used to represent a wet year. Lands within the Agriculture Land Reserve (ALR), depicted in green in Figure 1 were included in the project.

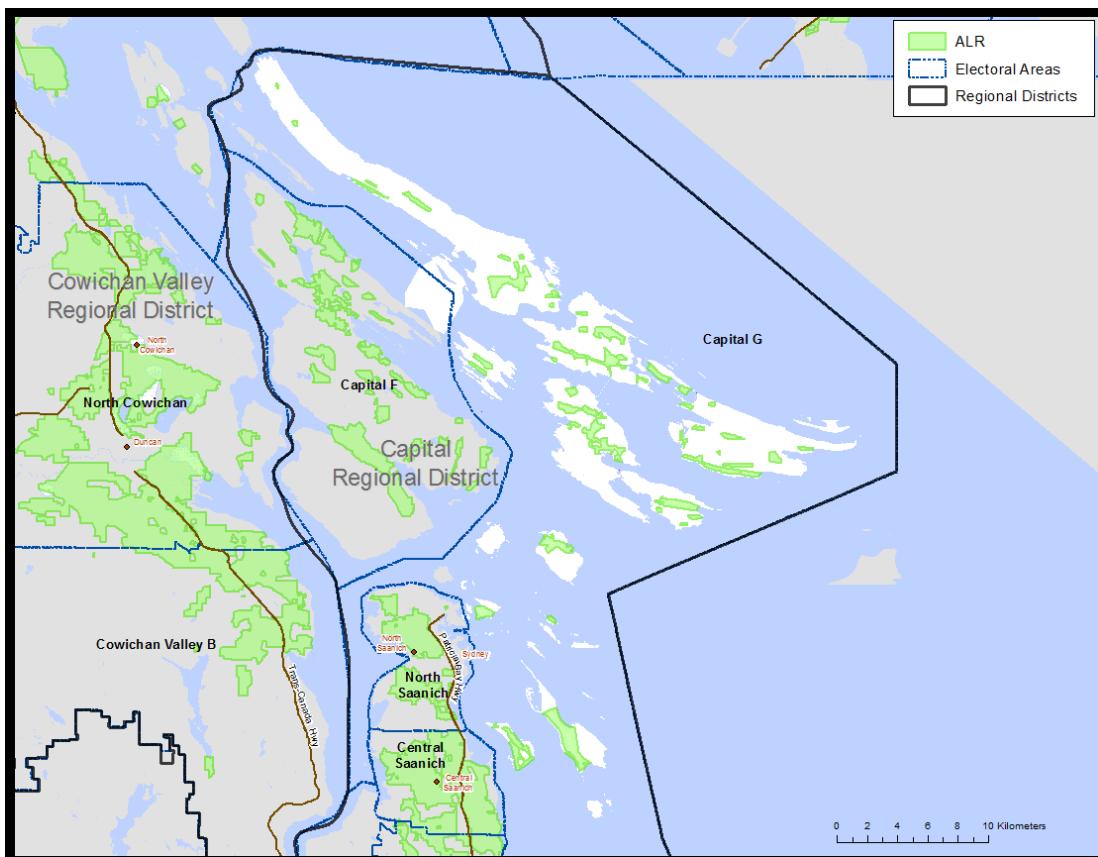


Figure 1 Map of ALR in SGI

Methodology

The Model is based on a Geographic Information System (GIS) database that contains information on cropping, irrigation system type, soil texture and climate data. An explanation of how information was compiled for each is given below. The survey area included all properties within the ALR and areas that were zoned for agriculture by the local government. The inventory was undertaken by Ministry of Agriculture (AGRI) staff, hired professional contractors and summer students.

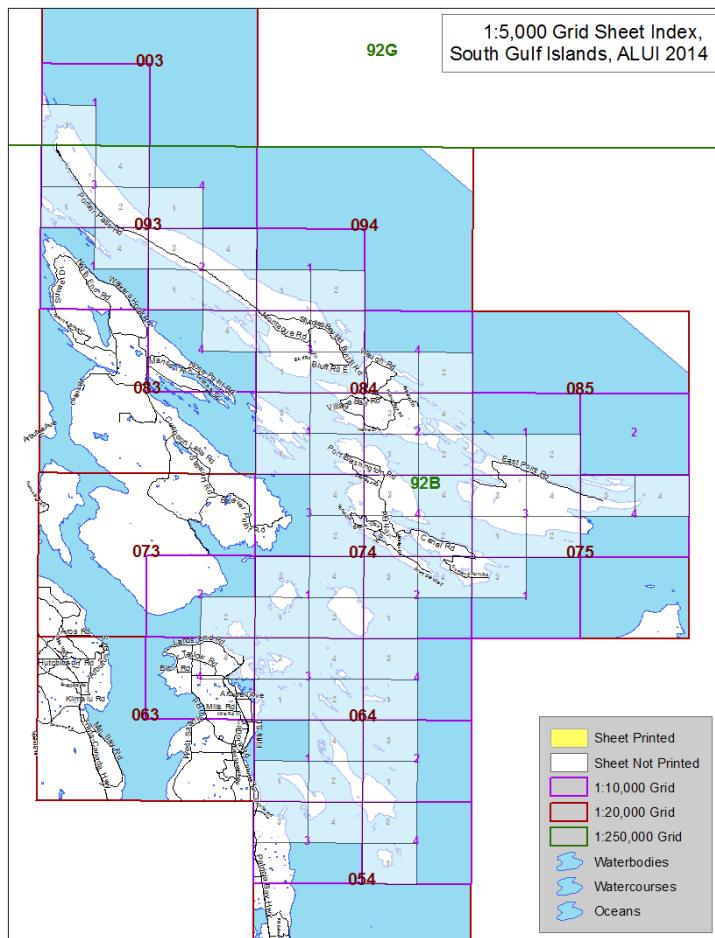


Figure 2 Overlaid Survey Map Sheets, SGI

Cadastre

Cadastre information was provided by the Capital Regional District and Island Trust. The entire watershed is covered in one dataset which allows the Model to report out on sub-basins and groundwater aquifers. A GIS technician used aerial photographs to conduct an initial review of cropping information by cadastre, and divided the cadastre into polygons that separate farmstead and driveways from cropping areas. Different crops were also separated into different polygons if the difference could be identified on the aerial photographs. This data was entered into the database that was used by the field teams to conduct and complete the land use survey.

Land Use Survey

The survey maps and database were created by AGRI for the survey crew to enter data about each property. Surveys were done during the summer of 2014. The survey crew drove by each property where the team checked the database for accuracy using visual observation and the aerial photographs on the survey maps. A Professional Agrologist verified what was on the site and a GIS technician altered the codes in the database as necessary (Figure 3). Corrections were handwritten on the maps. The map sheets were then brought back to the office to have the hand-drawn lines digitized into the GIS system and have the additional polygons entered into the database.

Once acquired through the survey, the land use data was brought into the GIS to facilitate analysis and produce maps. Digital data, in the form of a database and GIS shape files (for maps), is available upon request through a data sharing agreement with the Ministry of Agriculture.



Figure 3 Land Use Survey

Figure 4 provides an example of a map sheet from the SGI watershed. The SGI region was divided into 211 map sheets. Each map sheet also had a key map to indicate where it was located in the region.

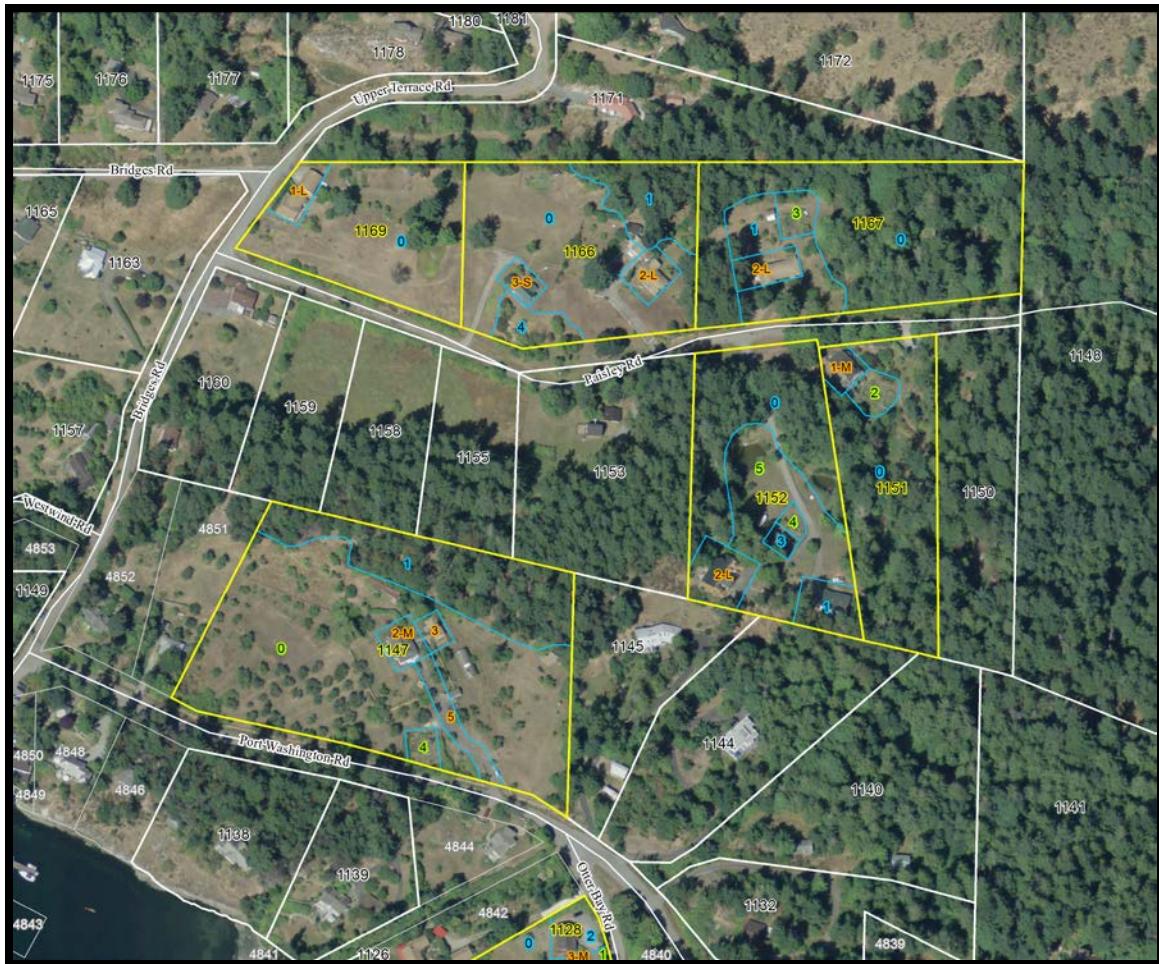


Figure 4 GIS Map Sheet

The smallest unit for which water use is calculated are the polygons within each cadastre. A polygon is determined by a change in land use or irrigation system within a cadastre. Polygons are designated as blue lines within each cadastre as shown in Figures 4 and 5. The dataset for SGI encompasses 2,444 inventoried land parcels that are in or partially in the ALR. There are a total of 12,512 polygons generated within these land parcels. Figure 5 provides an enhanced view of a cadastre containing three polygons. Each cadastre has a unique identifier as does each polygon. The polygon identifier is acknowledged by PolygonID. This allows the survey team to call up the cadastre in the database, review the number of polygons within the cadastre and ensure the land use is coded accurately for each polygon.



Figure 5 Cadastre with Polygons

Soil Information

Digital soil information is currently not available for the Southern Gulf Islands. The soils have therefore been defaulted to cultured medium (for nursery and greenhouse operations), peat (for cranberry), and sandy loam for the remaining crop types.

Soil information will be obtained digitally from the Ministry of Environment's Terrain and Soils Information System. The Computer Assisted Planning and Map Production application (CAPAMP) will provide detailed (1:20,000 scale) soil surveys that were conducted in the Lower Mainland, on Southeast Vancouver Island, and in the Okanagan-Similkameen areas during the early 1980s. Products developed include soil survey reports, maps, agriculture capability and other related themes. Soil information required for this project was the soil texture (loam, etc.), the available water storage capacity and the peak infiltration rate for each texture type.

The intersection of soil boundaries with the cadastre and land use polygons creates additional polygons that the Model uses to calculate water demand. Figure 6 shows how the land use information is divided into additional polygons using the soil boundaries. The Model calculates water demand using every different combination of crop, soil and irrigation system as identified by each polygon.

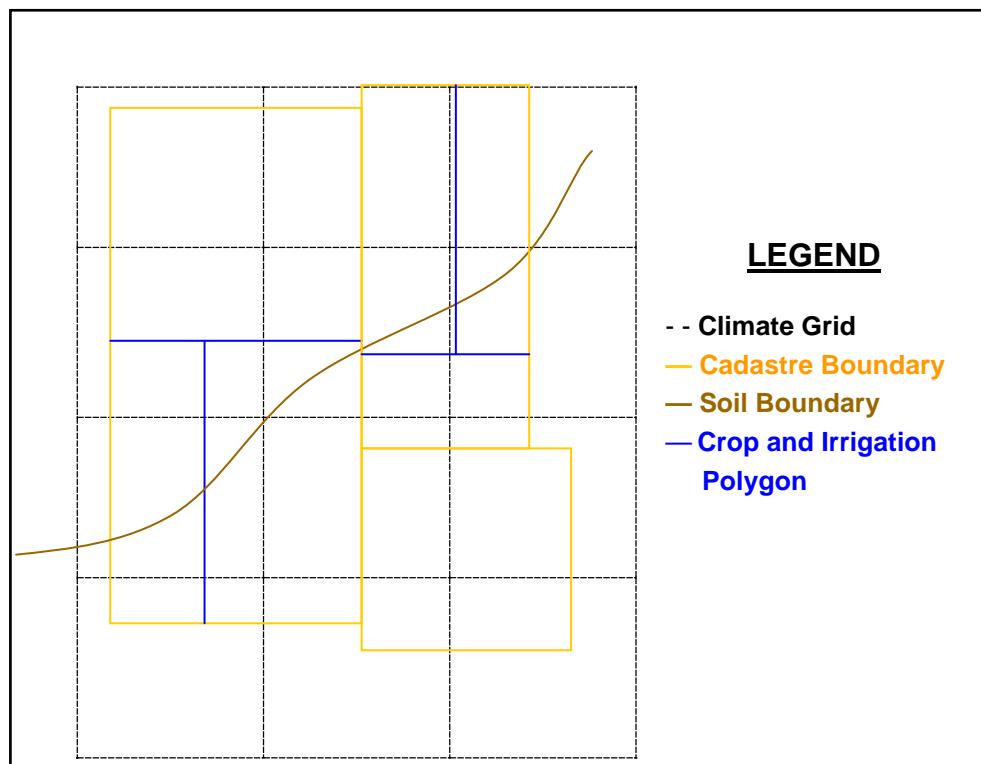


Figure 6 GIS Model Graphic

Climate Information

The agricultural water demand is calculated using climate, crop, irrigation system and soil information data. To incorporate the climatic diversity, climate layers were developed for the entire region on a 500 m x 500 m grid. Each grid cell contains daily climate data, minimum and maximum temperature (T_{\min} and T_{\max}), and precipitation which allows the Model to calculate a daily reference evapotranspiration rate (ET_o) value. A range of agro-climatic indices such as growing degree days (GDD), corn heat units (CHU), frost free days and temperature sum (Tsum) can also be calculated for each grid cell based on temperature data. These values are used to determine seeding dates and the length of the growing season in the Model.

The climate dataset has been developed by using existing data from climate stations in and around SGI from 1961 to 2003. This climate data set was then interpolated to provide a climate data layer for the entire watershed on the 500 m x 500 m grid. A detailed description of the Model can be obtained by contacting the authors.

Some of the existing climate stations that were used to determine the climate coverage are shown in Figure 7. The attributes attached to each climate grid cell include:

- Latitude
- Longitude
- Elevation
- Aspect
- Slope
- Daily Precipitation
- Daily T_{\max} and T_{\min}

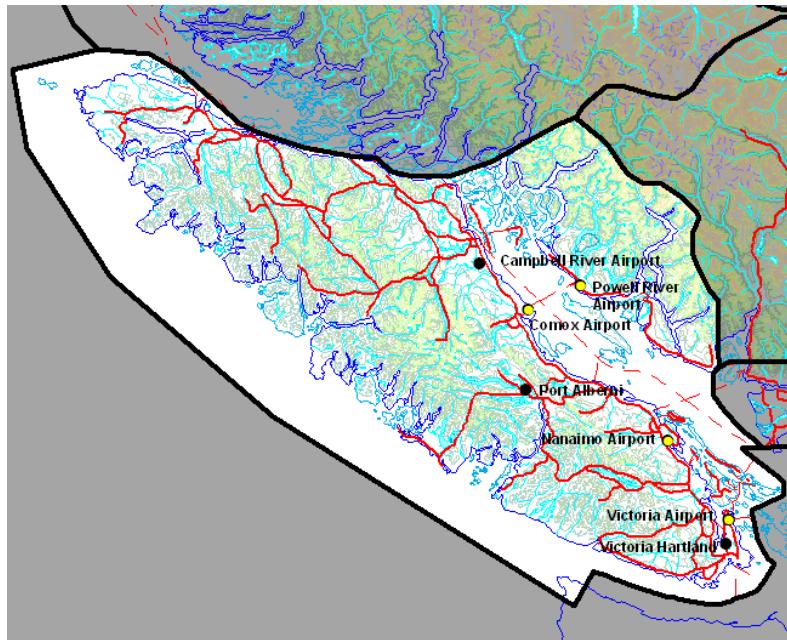


Figure 7 SGI Area Climate Stations

The climate database generated contains T_{\min} , T_{\max} , T_{mean} and Precipitation for each day of the year from 1961 to 2003. The parameters that need to be selected, calculated and stored within the Model are evapotranspiration (ET_o), Tsum of 1,000 (for the Island), effective precipitation (EP), frost free days, GDD with base temperatures of 5 °C and 10 °C, CHU, and first frost date. These climate and crop parameters are used to determine the growing season length as well as the beginning and end of the growing season in Julian day.

Model Calculations

The Model calculates the water demand for each polygon by using crop, irrigation, soil and climate parameters as explained below. Each polygon has been assigned an ID number as mentioned previously.

It should be noted that in the SGI, many low-lying areas have high water tables which will reduce the overall irrigation demand. Agricultural water demand results from the Model will therefore be higher than what may actually be used as water tables have not been taken into the equation.

Crop

The CropID is an attribute of the PolygonID as each polygon will contain a single crop. The crop information (observed during the land use survey) has been collected and stored with PolygonID as part of the land use survey. CropID will provide cropping attributes to the Model for calculating water use for each polygon. CropID along with the climate data will also be used to calculate the growing season length and the beginning and end of the growing season. The attributes for CropID include rooting depth, availability coefficient, crop coefficient and a drip factor.

Rooting depth is the rooting depth for a mature crop in a deep soil.

An availability coefficient is assigned to each crop. The availability coefficient is used with the IrrigID to determine the soil moisture available to the crop for each PolygonID.

The crop coefficient adjusts the calculated ET_o for the stages of crop growth during the growing season. Crop coefficient curves have been developed for every crop. The crop coefficient curve allows the Model to calculate water demand with an adjusted daily ET_o value throughout the growing season.

The drip factor is used in the water use calculation for polygons where drip irrigation systems are used. Since the Model calculates water use by area, the drip factor adjusts the percentage of area irrigated by the drip system for that crop.

Irrigation

The IrrigID is an attribute of the PolygonID as each polygon will have a single irrigation system type operating. The irrigation information has been collected and stored (as observed during the land use survey) with the land use data. The land use survey determined if a polygon had an irrigation system operating, what the system type was, and if the system was being used. The IrrigID has an irrigation efficiency listed as an attribute.

Two of the IrrigID's, Overtreedrip and Overtreemicro are polygons that have two systems in place. Two irrigation ID's occur when an overhead irrigation system has been retained to provide crop cooling or frost protection. In this case, the efficiencies used in the Model are the drip and microsprinkler efficiencies.

Soil

The soil texture layer is not available for the Southern Gulf Islands yet. The soils have therefore been defaulted to cultured medium (for nursery and greenhouse operations), peat (for cranberry), and sandy loam for the remaining crop types.

The soil layer will be obtained from CAPAMP at the Ministry of Environment. In addition, soil data provided by Agriculture and Agri-Food Canada (AAFC) will also be used to generate multiple soil layers within each polygon. Each parcel will be assigned the most predominant soil polygon, and then for each crop field within that soil polygon, the most predominant texture within the crop's rooting depth will be determined and assigned to the crop field.

Note that textures could repeat at different depths – the combined total of the thicknesses determined the most predominant texture. For example, a layer of 20 cm sand, followed by 40 cm clay and then 30 cm of sand would have sand be designated at the predominant soil texture.

The attributes attached to the SoilID is the Available Water Storage Capacity (AWSC) which is calculated using the soil texture and crop rooting depth.

The Maximum Soil Water Deficit (MSWD) is calculated to determine the parameters for the algorithm that is used to determine the Irrigation Requirement (IR). The Soil Moisture Deficit at the beginning of the season is calculated using the same terms as the MSWD.

Climate

The climate data in the Model is used to calculate a daily reference evapotranspiration rate (ET_o) for each climate grid cell. The data that is required to calculate this value are:

- Elevation, metres (m)
- Latitude, degrees ($^{\circ}$)
- Minimum Temperature, degree Celsius ($^{\circ}\text{C}$)
- Maximum Temperature, degree Celsius ($^{\circ}\text{C}$)
- Classification as Coastal or Interior
- Classification as Arid or Humid
- Julian Day

Data that is assumed or are constants in this calculation are:

• Wind speed	2 m/s
• Albedo or canopy reflection coefficient,	0.23
• Solar constant, G_{sc}	$0.082 \text{ MJ}^{-2}\text{min}^{-1}$
• Interior and Coastal coefficients, K_{Rs}	0.16 for interior locations 0.19 for coastal locations
• Humid and arid region coefficients, K_o	0 $^{\circ}\text{C}$ for humid/sub-humid climates 2 $^{\circ}\text{C}$ for arid/semi-arid climates

Agricultural Water Demand Equation

The Model calculates the Agriculture Water Demand (AWD) for each polygon, as a unique crop, irrigation system, soil and climate data is recorded on a polygon basis. The polygons are then summed to determine the AWD for each cadastre. The cadastre water demand values are then summed to determine AWD for the basin, sub-basin, water purveyor or local government. The following steps provide the

process used by the Model to calculate Agricultural Water Demand. Detailed information is available on request.

1. Pre-Season Soil Moisture Content

Prior to the start of each crop's growing season, the soil's stored moisture content is modelled using the soil and crop evaporation and transpiration characteristics and the daily precipitation values. Precipitation increases the soil moisture content and evaporation (modelled using the reference potential evapotranspiration) depletes it. In general, during the pre-season, the soil moisture depth cannot be reduced beyond the maximum evaporation depth; grass crops in wet climates, however, can also remove moisture through crop transpiration.

The process used to model the pre-season soil moisture content is:

1. Determine whether the modelling area is considered to be in a *wet* or *dry* climate (see *Wet/Dry Climate Assessment*), and retrieve the early season evaporation factor in the modelling area
2. For each crop type, determine the start of the growing season (see *Growing Season Boundaries*)
3. For each crop and soil combination, determine the *maximum soil water deficit* (MSWD) and *maximum evaporation factor* (maxEvaporation)
4. Start the initial storedMoisture depth on January 1 at the MSWD level
5. For each day between the beginning of the calendar year and the crop's growing season start, calculate a new stored moisture from:
 - a. the potential evapotranspiration (ET_o)
 - b. the early season evaporation factor (earlyEvaporationFactor)
 - c. the effective precipitation (EP) = actual precipitation \times earlyEvaporationFactor
 - d. daily Climate Moisture Deficit (CMD) = $ET_o - EP$
 - e. storedMoisture = previous day's storedMoisture – CMD

A negative daily CMD (precipitation in excess of the day's potential evapotranspiration) adds to the stored moisture level while a positive climate moisture deficit reduces the amount in the stored moisture reservoir. The stored moisture cannot exceed the maximum soil moisture deficit; any precipitation that would take the stored moisture level above the MSWD gets ignored.

For all crops and conditions except for grass in wet climates, the stored moisture content cannot drop below the maximum soil water deficit minus the maximum evaporation depth; without any crop transpiration in play, only a certain amount of water can be removed from the soil through evaporative processes alone. Grass in wet climates does grow and remove moisture from the soil prior to the start of the irrigation season, however. In those cases, the stored moisture level can drop beyond the maximum evaporation depth, theoretically to 0.

Greenhouses and mushroom barns have no stored soil moisture content.

2. In-Season Precipitation

During the growing season, the amount of precipitation considered effective (EP) depends on the overall wetness of the modelling area's climate (see *Wet/Dry Climate Assessment*). In dry climates, the first 5 mm of precipitation is ignored, and the EP is calculated as 75% of remainder:

$$EP = (\text{Precip} - 5) \times 0.75$$

In wet climates, the first 5 mm is included in the EP. The EP is 75% of the actual precipitation:

$$EP = \text{Precip} \times 0.75$$

Greenhouses and mushroom barns automatically have an EP value of 0.

3. ***Crop Cover Coefficient (K_c)***

As the crops grow, the amount of water they lose due to transpiration changes. Each crop has a pair of polynomial equations that provide the crop coefficient for any day during the crop's growing season. It was found that two curves, one for modelling time periods up to the present and one for extending the modelling into the future, provided a better sequence of crop coefficients than using a single curve for all years (currently 1961 to 2100). The application automatically selects the current or future curve as modelling moves across the *crop Curve Changeover Year*.

For alfalfa crops, there are different sets of equations corresponding to different cuttings throughout the growing season.

4. ***Crop Evapotranspiration (ET_c)***

The evapotranspiration for each crop is calculated as the general ET_o multiplied by the crop coefficient (K_c):

$$ET_c = ET_o \times K_c$$

5. ***Climate Moisture Deficit (CMD)***

During the growing season, the daily Climate Moisture Deficit (CMD) is calculated as the crop evapotranspiration (ET_c) less the Effective Precipitation (EP):

$$CMD = ET_c - EP$$

During each crop's growing season, a stored moisture reservoir methodology is used that is similar to the soil moisture content calculation in the pre-season. On a daily basis, the stored moisture level is used towards satisfying the climate moisture deficit to produce an *adjusted Climate Moisture Deficit (CMD_a)*:

$$CMD_a = CMD - \text{storedMoisture}$$

If the storedMoisture level exceeds the day's CMD, then the CMD_a is 0 and the stored moisture level is reduced by the CMD amount. If the CMD is greater than the stored moisture, then all of the stored moisture is used (storedMoisture is set to 0) and the adjusted CMD creates an irrigation requirement.

The upper limit for the storedMoisture level during the growing season is the maximum soil water deficit (MSWD) setting.

6. ***Crop Water Requirement (CWR)***

The Crop Water Requirement is calculated as the adjusted Climate Moisture Deficit (CMD_a) multiplied by the soil water factor (swFactor) and any stress factor (used primarily for grass crops):

$$CWR = CMD_a \times swFactor \times stressFactor$$

7. ***Irrigation Requirement (IR)***

The Irrigation Requirement is the Crop Water Requirement (CWR) after taking into account the irrigation efficiency (I_e) and, for drip systems, the drip factor (D_f):

$$IR = CWR \times \frac{D_f}{I_e}$$

For irrigation systems other than drip, the drip factor is 1.

8. ***Irrigation Water Demand (IWDperc and IWD)***

The portion of the Irrigation Water Demand lost to deep percolation is the Irrigation Requirement (IR) multiplied by the percolation factor (soilPercFactor):

$$IWD_{perc} = IR \times soilPercFactor$$

The final Irrigation Water Demand (IWD) is then the Irrigation Requirement (IR) plus the loss to percolation (IWD_{perc}):

$$IWD = IR + IWD_{perc}$$

9. ***Frost Protection***

For some crops (e.g. cranberries), an application of water is often used under certain climatic conditions to provide protection against frost damage. For cranberries, the rule is: when the temperature drops to 0 °C or below between March 16 and May 20 or between October 1 and November 15, a frost event will be calculated. The calculated value is an application of 2.5 mm per hour for 10 hours. In addition, 60% of the water is recirculated and reused, accounting for evaporation and seepage losses.

This amounts to a modelled water demand of 10 mm over the cranberry crop's area for each day that a frost event occurs between the specified dates.

10. Annual Soil Moisture Deficit

Prior to each crop's growing season, the Model calculates the soil's moisture content by starting it at full (maximum soil water deficit level) on January 1, and adjusting it daily according to precipitation and evaporation. During the growing season, simple evaporation is replaced by the crop's evapotranspiration as it progresses through its growth stages. At the completion of each crop's growing season, an annual soil moisture deficit (SMD) is calculated as the difference between the soil moisture content at that point and the maximum soil water deficit (MSWD):

$$\text{SMD} = \text{MSWD} - \text{storedMoisture}$$

In dry/cold climates, this amount represents water that the farmer would add to the soil in order to prevent it from freezing. Wet climates are assumed to have sufficient precipitation and warm enough temperatures to avoid the risk of freezing without this extra application of water; the SMD demand is therefore recorded only for dry areas.

There is no fixed date associated with irrigation to compensate for the annual soil moisture deficit. The farmer may choose to do it any time after the end of the growing season and before the freeze up. In the Model's summary reports, the water demand associated with the annual soil moisture deficit shows as occurring at time 0 (week 0, month 0, etc.) simply to differentiate it from other demands that do have a date of occurrence during the crop's growing season.

Greenhouses and mushroom barns do not have an annual soil moisture deficit.

11. Flood Harvesting

Cranberry crops are generally harvested using flood techniques. The Model calculates the flood harvesting demand as 250 mm of depth for 10% of the cranberry farmed area. For modelling purposes, it is assumed that 250 mm of water gets applied to the total cranberry crop area, 10% at a time. The water is reused for subsequent portions, but by the time the entire crop is harvested, all of the water is assumed to have been used and either depleted through losses or released from the farm.

The water demand is therefore calculated as a fixed 25 mm over the entire cranberry crop area. The harvesting generally takes place between mid-October and mid-November where the Model treats it as occurring on the fixed date of November 16.

Livestock Water Use

The Model calculates an estimated livestock water demand using agricultural census data and an estimate of the water use per animal. Water use for each animal type is calculated a bit differently depending on requirements. For example, for a dairy milking cow, the water demand for each animal includes, drinking, preparation for milking, pen and barn cleaning, milking system washout, bulk tank washout and milking parlor washing. However, for a dry dairy cow, the demand only includes drinking and pen and barn cleaning.

The water use is estimated on a daily basis per animal even though the facility is not cleaned daily. For example, for a broiler operation, the water use for cleaning a barn is calculated as 4 hours of pressure washing per cycle at a 10 gpm flow rate, multiplied by 6 cycles per barn with each barn holding 50,000 birds. On a daily basis, this is quite small with a value of 0.01 litres per day per bird applied.

For all cases, the daily livestock demand is applied to the farm location. However, in the case of beef, the livestock spend quite a bit of the year on the range. Since the actual location of the animals cannot be ascertained, the water demand is applied to the home farm location, even though most of the demand will not be from this location. Therefore, the animal water demand on a watershed scale will work fine but not when the demand is segregated into sub-watersheds or groundwater areas.

The estimates used for each livestock are shown in Table 1.

Table 1 Livestock Water Demand (Litres/day)

Animal Type	Drinking	Milking Preparation	Barn Component	Total
Milking Dairy Cow	65	5	15	85
Dry Cow	45		5	50
Swine	12		0.5	12.5
Poultry – Broiler	0.16		0.01	0.17
Poultry – Layer	0.08		0.01	0.09
Turkeys	0.35		0.01	0.36
Goats	8			8
Sheep	8			8
Beef – range, steer, bull, heifer	50			50
Horses	50			50

Definition and Calculation of Individual Terms used in the Irrigation Water Demand Equation

Growing Season Boundaries

There are three sets of considerations used in calculating the start and end of the irrigation season for each crop:

- temperature-based growing season derivations, generally using Temperature Sum (Tsum) or Growing Degree Day (GDD) accumulations
- the growing season overrides table
- the irrigation season overrides table

These form an order of precedence with later considerations potentially overriding the dates established for the previous rules. For example, the temperature-based rules might yield a growing season start date of day 90 for a given crop in a mild year. To avoid unrealistic irrigation starts, the season overrides table might enforce a minimum start day of 100 for that crop; at that point, the season start would be set to day 100. At the same time, a Water Purveyor might not turn on the water supply until day 105; specifying that as the minimum start day in the irrigation season overrides table would prevent any irrigation water demands until day 105.

This section describes the rules used to establish growing season boundaries based on the internal calculations of the Model. The GDD and Tsum Day calculations are described in separate sections. The *standard end of season* specified for several crops is the earlier of the end date of Growing Degree Day with base temperature of 5 °C (GDD₅) or the first frost.

1. Corn (silage corn)

- uses the corn_start date for the season start
- season end: earlier of the killing frost or the day that the CHU2700 (2700 Corn Heat Units) threshold is reached

2. Sweetcorn, Potato, Tomato, Pepper, Strawberry, Vegetable, Pea

- corn_start date for the season start
- corn start plus 110 days for the season end

3. Cereal

- GDD5 start for the season start
- GDD5 start plus 130 days for the season end

4. AppleHD, AppleMD, AppleLD, Asparagus, Berry, Blueberry, Ginseng, Nuts, Raspberry, Sourcherry, Treefruit, Vineberry

- season start: $(0.8447 \times \text{tsum600_day}) + 18.877$
- standard end of season

5. Pumpkin

- corn_start date
- standard end of season

- 6. Apricot**
 - season start: $(0.9153 \times \text{tsum400_day}) + 5.5809$
 - standard end of season
- 7. CherryHD, CherryMD, CherryLD**
 - season start: $(0.7992 \times \text{tsum450_day}) + 24.878$
 - standard end of season
- 8. Grape, Kiwi**
 - season start: $(0.7992 \times \text{tsum450_day}) + 24.878$
 - standard end of season
- 9. Peach, Nectarine**
 - season start: $(0.8438 \times \text{tsum450_day}) + 19.68$
 - standard end of season
- 10. Plum**
 - season start: $(0.7982 \times \text{tsum500_day}) + 25.417$
 - standard end of season
- 11. Pear**
 - season start: $(0.8249 \times \text{tsum600_day}) + 17.14$
 - standard end of season
- 12. Golf, TurfFarm**
 - season start: later of the GDD₅ start and the tsum300_day
 - standard end of season
- 13. Domestic, Yard, TurfPark**
 - season start: later of the GDD₅ start and the tsum400_day
 - standard end of season
- 14. Greenhouse (interior greenhouses)**
 - fixed season of April 1 – October 30
- 15. GH Tomato, GH Pepper, GH Cucumber**
 - fixed season of January 15 – November 30
- 16. GH Flower**
 - fixed season of March 1 – October 30
- 17. GH Nursery**
 - fixed season of April 1 – October 30
- 18. Mushroom**
 - all year: January 1 – December 31

19. Shrubs/Trees, Fstock, NurseryPOT

- season start: tsum500_day
- end: julian day 275

20. Floriculture

- season start: tsum500_day
- end: julian day 225

21. Cranberry

- season start: tsum500_day
- end: julian day 275

22. Grass, Forage, Alfalfa, Pasture

- season start: later of the GDD₅ and the tsum600_day
- standard end of season

23. Nursery

- season start: tsum400_day
- standard end of season

Evapotranspiration (ET_o)

The ET_o calculation follows the FAO Penman-Montieth equation. Two modifications were made to the equation:

- Step 6 – Inverse Relative Distance Earth-Sun (d_r)
Instead of a fixed 365 days as a divisor, the actual number of days for each year (365 or 366) was used.
- Step 19 – Evapotranspiration (ET_o)
For consistency, a temperature conversion factor of 273.16 was used instead of the rounded 273 listed.

Availability Coefficient (AC)

The availability coefficient is a factor representing the percentage of the soil's total water storage that the crop can readily extract. The factor is taken directly from the crop factors table (*crop_factors*) based on the cropId value.

Rooting Depth (RD)

The rooting depth represents the crop's maximum rooting depth and thus the depth of soil over which the plant interacts with the soil in terms of moisture extraction. The value is read directly from the crop factors table.

Stress Factor (*stressFactor*)

Some crops, such as *grasses*, are often irrigated to a less degree than their full theoretical requirement for optimal growth. The *stress factor* (*crop_groups_and_factors*) reduces the calculated demand for these crops.

Available Water Storage Capacity (AWSC)

The available water storage capacity is a factor representing the amount of water that a particular soil texture can hold without the water dropping through and being lost to deep percolation. The factor is taken directly from the soil factors table (*soil_factors*).

Maximum Soil Water Deficit (MSWD)

The maximum soil water deficit is the product of the crop's availability coefficient, rooting depth, and the available water storage capacity of the soil:

$$MSWD = RD \times AWSC \times AC$$

Deep Percolation Factor (*soilPercFactor*)

The soil percolation factor is used to calculate the amount of water lost to deep percolation under different management practices.

For greenhouse crops, the *greenhouse leaching factor* is used as the basic soil percolation factor. This is then multiplied by a greenhouse recirculation factor, if present, to reflect the percentage of water re-captured and re-used in greenhouse operations.

$$soilPercFactor = soilPercFactor \times (1 - recirculationFactor)$$

For Nursery Pot (Nursery POT) and Forestry Stock (Fstock) crops, the soil percolation factor is fixed at 35%. For other crops, the factor depends on the soil texture, the MSWD, the irrigation system, and the Irrigation Management Practices code. The percolation factors table (*soil_percolation_factors*) is read to find the first row with the correct management practices, soil texture and irrigation system, and a MSWD value that matches or exceeds the value calculated for the current land use polygon.

If the calculated MSWD value is greater than the index value for all rows in the percolation factors table, then the highest MSWD factor is used. If there is no match based on the passed parameters, then a default value of 0.25 is applied.

For example, a calculated MSWD value of 82.5 mm, a soil texture of sandy loam (SL) and an irrigation system of solid set overtree (Ssovertree) would retrieve the percolation factor associated with the MSWD index value of 75 mm in the current table (presently, there are rows for MSWD 50 mm and 75 mm for SL and Ssovertree).

Maximum Evaporation Factor (maxEvaporation)

Just as different soil textures can hold different amounts of water, they also have different depths that can be affected by evaporation. The factor is taken directly from the soil factors table.

Irrigation Efficiency (I_e)

Each irrigation system type has an associated efficiency factor (inefficient systems require the application of more water in order to satisfy the same crop water demand). The factor is read directly from the irrigation factors table (*irrigation_factors*).

Soil Water Factor (swFactor)

For the greenhouse “crop”, the soil water factor is set to 1. For other crops, it is interpolated from a table (*soil_water_factors*) based on the MSWD. For Nurseries, the highest soil water factor (lowest MSWD index) in the table is used; otherwise, the two rows whose MSWD values bound the calculated MSWD are located and a soil water factor interpolated according to where the passed MSWD value lies between those bounds.

For example, using the current table with rows giving soil water factors of 0.95 and 0.9 for MSWD index values of 75 mm and 100 mm respectively, a calculated MSWD value of 82.5 mm would return a soil water factor of:

$$0.95 + \left[\frac{82.5 - 75}{100 - 75} \times (0.9 - 0.95) \right] \\ = 0.935$$

If the calculated MSWD value is higher or lower than the index values for all of the rows in the table, then the factor associated with the highest or lowest MSWD index is used.

Early Season Evaporation Factor (earlyEvaporationFactor)

The effective precipitation (precipitation that adds to the stored soil moisture content) can be different in the cooler pre-season than in the growing season. The early season evaporation factor is used to determine what percentage of the precipitation is considered effective prior to the growing season.

Crop Coefficient (K_c)

The crop coefficient is calculated from a set of fourth degree polynomial equations representing the crop’s ground coverage throughout its growing season. The coefficients for each term are read from the crop factors table based on the crop type, with the variable equalling the number of days since the start of the crop’s growing season. For example, the crop coefficient for Grape on day 35 of the growing season would be calculated as:

$$K_c = [0.0000000031 \times (35)^4] + [-0.0000013775 \times (35)^3] + (0.0001634536 \times (35)^2) + (-0.0011179845 \times 35) + 0.2399004137 \\ = 0.346593241$$

Alfalfa crops have an additional consideration. More than one cutting of alfalfa can be harvested over the course of the growing season, and the terms used for the crop coefficient equation changes for the different cuttings. For alfalfa, the alfalfa cuttings table is first used to determine which cutting period the day belongs to (first, intermediate or last), and after that the associated record in the crop factors table is accessed to determine the terms.

There are two sets of polynomial coefficients used to calculate the crop coefficient; the first set is used for modelling time periods up to the year specified as the *crop curve changeover year*; and the second for modelling into the future. The changeover year will be modified as time goes on and new historical climate observations become available.

Growing Degree Days (GDD)

The Growing Degree Day calculations generate the start and end of GDD accumulation.

1. Start of GDD Accumulation

For each base temperature (bases 5 and 10 are always calculated, other base temperature can be derived), the start of the accumulation is defined as occurring after 5 consecutive days of T_{mean} matching or exceeding the base temperature (BaseT). The search for the start day gets reset if a killing frost ($< -2^{\circ}\text{C}$) occurs, even after the accumulation has started. The search also restarts if there are 2 or more consecutive days of $T_{\text{min}} \leq 0^{\circ}\text{C}$. The GDD start is limited to Julian days 1 to 210; if the accumulation has not started by that point, then it is unlikely to produce a reasonable starting point for any crop.

2. End of GDD accumulation

The search for the end of the GDD accumulation begins 50 days after its start. The accumulation ends on the earlier of 5 consecutive days where T_{mean} fails to reach BaseT (strictly *less than*) or the first killing frost (-2°C).

During the GDD accumulation period, the daily contribution is the difference between T_{mean} and BaseT, as long as T_{mean} is not less than BaseT:

$$\text{GDD} = T_{\text{mean}} - \text{BaseT}; 0 \text{ if negative}$$

Frost Indices

Three frost indices are tracked for each year:

- the last spring frost is the latest day in the first 180 days of the year with a $T_{\text{min}} \leq 0^{\circ}\text{C}$
- the first fall frost is the first day between days 240 and the end of the year where $T_{\text{min}} \leq 0^{\circ}\text{C}$
- the killing frost is the first day on or after the first fall frost where $T_{\text{min}} \leq -2^{\circ}\text{C}$

Corn Heat Units (CHU)

The Corn Heat Unit is the average of two terms using T_{min} and T_{max} . Prior to averaging, each term is set to 0 individually if it is negative.

$$\begin{aligned}
 \text{term1} &= [3.33 \times (T_{\max} - 10)] - [0.084 \times (T_{\max} - 10) \times (T_{\max} - 10)]; \text{0 if negative} \\
 \text{term2} &= 1.8 \times (T_{\min} - 4.44); \text{0 if negative} \\
 \text{CHU} &= \frac{(\text{term1} + \text{term2})}{2}
 \end{aligned}$$

Corn Season Start and End

The corn season boundary derivations are similar to the GDD determinations. The start day is established by 3 consecutive days where $T_{\text{mean}} \geq 11.2^{\circ}\text{C}$. As in the case of the GDD calculations, the search for the corn season start day gets reset if $T_{\min} \leq -2^{\circ}\text{C}$, or if there are 2 or more consecutive days of $-2^{\circ}\text{C} \leq T_{\min} \leq 0^{\circ}\text{C}$.

The search for the silage corn season end begins 50 days after the start. The season ends on the earlier of a mean temperature dropping below 10.1 or a killing frost.

The end of the sweet corn season is defined as 110 days after the season start.

Tsum Indices

The Tsum day for a given number is defined as the day that the sum of the positive daily T_{mean} reaches that number. For example, the Tsum400 day is the day where the sum of the positive T_{mean} starting on January 1 sum to 400 units or greater.

Days where T_{mean} falls below 0°C are simply not counted; therefore, the Model does not restart the accumulation sequence.

Wet/Dry Climate Assessment

Starting with the Lower Mainland, some of the modelling calculations depend on an assessment of the general climatic environment as *wet* or *dry*. For example, when modelling the soil moisture content prior to the start of the crop's growing season, the reservoir can only be drawn down by evaporation except for grass crops in *wet* climates which can pull additional moisture out of the soil.

The assessment of wet or dry uses the total precipitation between May 1 and September 30. If the total is more than 125 mm during that period, the climate is considered to be *wet* and otherwise *dry*.

Groundwater Use

The Model generates water sources for irrigation systems. This is done by first determining which farms are supplied by a water purveyor, and then coding those farms as such. Most water purveyors use surface water but where groundwater is used, the farms are coded as groundwater use. The second step is to check all water licences and assign the water licences to properties in the database. The remaining farms that are irrigating will therefore not have a water licence or be supplied by a water purveyor. The assumption is made that these farms are irrigated by groundwater sources.

Land Use Results

A summary of the land area and the inventoried area of the Southern Gulf Islands is shown in Table 2. The inventoried area includes parcels that are in and partially in the Agricultural Land Reserve (ALR). The primary agricultural use of the ALR area is shown in Table 3 where only 726 ha currently have active agriculture. Refer to the Agricultural Land Use Inventory (ALUI) report for details.

The Model also reports out on groundwater aquifers. Figure 8 provides a schematic of the higher yielding aquifer areas in the SGI Region based on the information from B.C. Ministry of Environment.

Table 2 Overview of SGI's Land and Inventoried Area		
Area Type	Area (ha)	Number of Parcels
SGI		
Total Area	448,785	-
Area of Water Feature	105	-
Area of Land (excluding water features)	19,103	-
ALR Area	2,365	620
Area of First Nations Reserve	468	-
Inventoried Area		
Total Inventoried Area	6,583	727
Area of First Nations Reserve in ALR	17	-

**Table 3 Summary of Primary Agricultural Activities
within the Inventoried Area where Primary
Land Use is Agriculture in SGI**

Primary Agriculture Activity	Total Land Cover (ha)
Forage, pasture, grass	639
Tree fruits	25
Grapes	24
Vegetables	24
Turf, Nut Trees, Specialty	7
Berries	1
Glass and poly greenhouse	1
Grains, cereals, oilseeds	<1
Floriculture	<1
Nursery	<1
Total	726

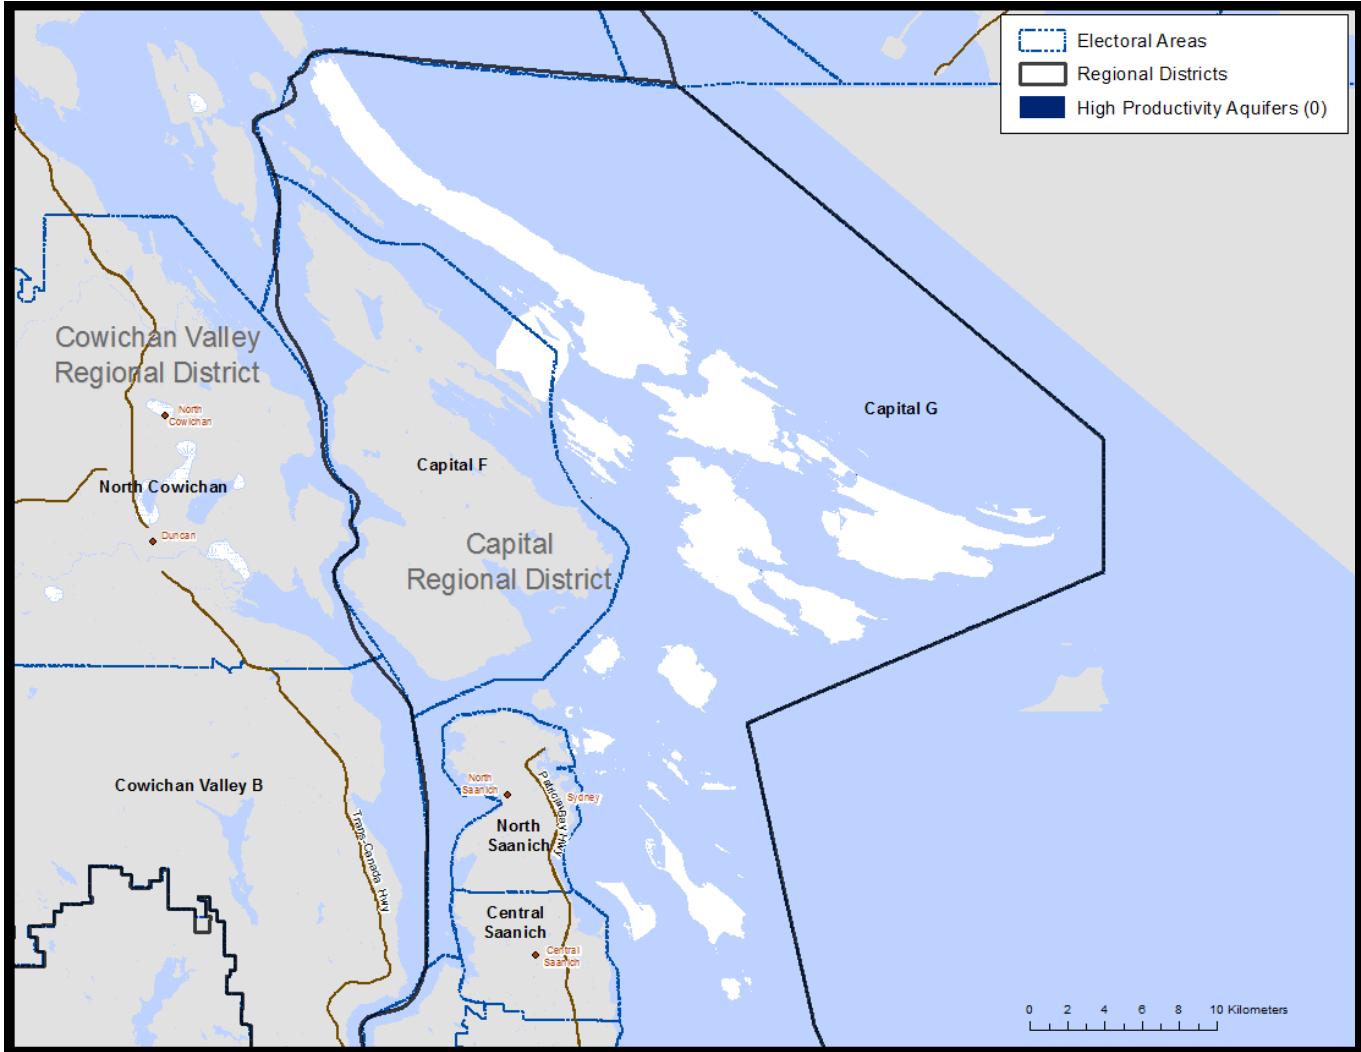


Figure 8 Higher Productive Groundwater Aquifers in SGI

Agricultural Water Demand Model Results

The Model has a reporting feature that can save and generate reports for many different scenarios that have been pre-developed. This report will provide a summary of the reported data in the Appendices. Climate data from 1997 and 2003 were chosen as they represent a relatively wet year and dry year respectively. Most reports are based on the 2003 data since the maximum current demand can then be presented.

Annual Crop Water Demand – Tables A and B

The Model can use three different irrigation management factors, good, average and poor. Unless otherwise noted, average management were used in the tables. Table A provides the annual irrigation water demand for current crop and irrigation systems for the year 2003 using average irrigation management, and Table B provides the same data for 1997.

The outdoor irrigated acreage in SGI is 109 hectares (ha) including 35 ha in golf courses. The total annual irrigation demand for this area was 924,823 m³ in 2003 (a dry year), and dropped to 488,778 m³ in 1997 (a wet year).

Of interest is that during a wet year like 1997, the demand was only 53% of a hot dry year like 2003. Another point to consider is that the actual water demand supplied by an irrigation system may be less than the numbers shown above. The reason is that the Model does not have an adjustment for water supplied to crops grown in low lying areas with a high water table. In portions of the SGI, farms located in the lowland regions have high water tables during portions of the growing season. Water may also be supplied to the crops by the drainage and irrigation ditch infrastructure. The high water tables will reduce irrigation demand which is not accounted for in the Model outputs. The Model numbers should therefore be considered the higher estimate of demand.

In addition, the Model also calculates demand based on relatively good practices. As such, actual use may actually be higher or lower than what is calculated by the Model.

The predominant irrigated agriculture crop in the SGI is forage that includes forage corn, grass, legume and pasture.

Annual Water Demand Reported by Irrigation System – Table C

The crop irrigation demand can also be reported by irrigation system type as shown in Tables C. The total area irrigated includes indoor irrigation, such as greenhouses. The predominant irrigation system used is sprinkler followed by golf-sprinkler systems.

Annual Water Demand by Soil Texture – Table D

Note that since soil texture data is not available at this time for the SGI, the irrigation demand information shown in Table D is not represented accurately. The soils have therefore been defaulted to cultured medium (for nursery and greenhouse operations), peat (for cranberry), and sandy loam for the remaining crop types.

Annual Water Demand by Sub-Basin – Table E

The Model can estimate water demand based on sub-basin, i.e., Finlay Brook, Greenburn Creek, Lyall Creek, and East of Gulf Islands as shown in Table E.

Irrigation Management Factors – Table F

Note that since soil texture data is not available at this time for the Southern Gulf Islands, the irrigation management information show in Table F is not represented accurately.

The Model can estimate water demand based on poor, average and good irrigation management factors. This is accomplished by developing an irrigation management factor for each crop, soil and irrigation system combination based on subjective decision and percolation rates. The Maximum Soil Water Deficit (MSWD) is the maximum amount of water that can be stored in the soil within the crop rooting zone. An irrigation system applying more water than what can be stored will result in percolation beyond the crop's rooting depth. Irrigation systems with high application rates will have a probability of higher percolation rates, a stationary gun for instance.

For each soil class, a range of four MSWD are provided, which reflect a range of crop rooting depths. An irrigation management factor, which determines the amount of leaching, is established for each of the MSWD values for the soil types (Table 4). The management factor is based on irrigation expertise as to how the various irrigation systems are able to operate. For example, Table 4 indicates that for a loam soil and a MSWD of 38 mm, a solid set overtree system has a management factor of 0.1 for good management while the drip system has a management factor of 0.05. This indicates that it is easier to prevent percolation with a drip system than it is with a solid set sprinkler system. For poor management, the factors are higher.

There are a total of 1,344 irrigation management factors established for the 16 different soil textures, MSWD and 21 different irrigation system combinations used in the Model.

Table 4 Irrigation Management Factors

Soil Texture	MSWD	Solid Set Overtree			Drip		
		Good	Average	Poor	Good	Average	Poor
Loam	38	0.10	0.15	0.20	0.05	0.10	0.15
	50	0.05	0.10	0.15	0.05	0.075	0.10
	75	0.05	0.10	0.15	0.05	0.075	0.10
	100	0.05	0.075	0.10	0.05	0.075	0.10
Sandy loam	25	0.20	0.225	0.25	0.10	0.15	0.20
	38	0.10	0.15	0.20	0.10	0.125	0.15
	50	0.05	0.10	0.15	0.05	0.10	0.10
	75	0.05	0.10	0.15	0.05	0.075	0.10

The management factors increase as the MSWD decreases because there is less soil storage potential in the crop rooting depth. For irrigation systems such as guns, operating on a pasture which has a shallow

rooting depth, on a sandy soil which cannot store much water, the poor irrigation management factor may be as high as 0.5.

The management factor used in the Model assumes all losses are deep percolation while it is likely that some losses will occur as runoff as well.

Table F provides an overview of the impacts on the management factor and irrigation systems used. Since the predominant crop type is forage and the type of irrigation systems are sprinkler or gun systems there is not much difference in water demand shown for improving irrigation management.

Table F also provides percolation rates based on good, average and poor management using 2003 climate data. In summary, good management is 156,389 m³, average is 178,017 m³ and poor management is 199,645 m³. Percolation rates for poor management are 22% higher than for good management.

Deep Percolation – Table G

Note that since soil texture data is not available at this time for the Southern Gulf Islands, the deep percolation information show in Table G is not represented accurately.

The percolation rates vary by crop, irrigation system type, soil and the management factor used. Table G shows the deep percolation amounts by irrigation system type for average management. The last column provides a good indication of the average percolation per hectare for the various irrigation system types. Landscape sprinkler systems have a high percolation rate predominantly because application rates are high and the crop rooting depth is quite shallow.

Improved Irrigation Efficiency and good Management – Table H

There is an opportunity to reduce water use by converting irrigation systems to a higher efficiency for some crops. For example, drip systems could be used for all berry crops, vegetable crops and some of the other horticultural crops, but not forage crops. In addition, using better management such as irrigation scheduling techniques will also reduce water use, especially on forage where drip conversion is not possible. Table H provides a scenario of water demand if all sprinkler systems are converted to drip systems for horticultural crops in SGI, and converting current irrigation system of forage parcels over 10 ha to low-pressure pivot systems, using good irrigation management. The water demand for 2003 would reduce from 924,823 m³ to 781,540 m³ (15% reduction).

Water Demand for Frost Protection, Greenhouse and Crop Harvesting – Table I

Greenhouse water use is calculated with separate algorithms as the water demand may not be directly related to ET₀ during times of the year when the greenhouse is heated. The estimated water demand is therefore shown separately from other crops in Table I. Other crops that fall in this category are potted nursery plants, forestry stock found inside plastic shelters.

Irrigation systems are also used for frost protection for crops such as cranberries. An estimate of frost protection is also provided. The Model calculates a water demand for frost protection whenever the temperature drops to 0°C in the spring. In 1997, only about 10% of the cranberry area had one or more

frost events. In 2003, no frost events were indicated. In reality, growers would have applied more water than what is indicated in the Model, as frost protection systems are often started prior to a frost to eliminate any risk. Cranberries also use water for harvesting purposes. An estimate of the cranberry harvesting water requirements are provided in Table I.

Livestock Water Use – Table J

The Model provides an estimate of water use for livestock. The estimate is based on the number of animals in SGI as determined by the latest census, the drinking water required for each animal per day and the barn or milking parlour wash water. Values used are shown in Table J. For SGI, the amount of livestock water is estimated at 28,185 m³.

Climate Change Water Demand for 2050 – Table K

The Model also has access to climate change information until the year 2100. While data can be run for each year, three driest years in the 2050's were selected to give a representation of climate change. Figure 9 shows the climate data results which indicate that 2053, 2056, and 2059 generate the highest annual ET_o and lowest annual precipitation. These three years were used in this report.

Table K provides the results of climate change on irrigation demand for the three years selected using current crops and irrigation systems. Current crops and irrigation systems are used to show the increase due to climate change only, with no other changes taking place.

Climate change models (access1-0-rcp85, canesm2-rcp85m, and cnrm-cm5-rcp45) were used for running future climate change scenarios. While the data is shown from each Model for all three years, it is best to average the results. Without running a lot of climate datasets it is difficult to get a reliable trend. However, the preliminary data indicates that without changing crops and irrigation systems climate change may have a significant impact in drier years. To get a better picture of the effects of climate change the Model should be run for all years. This will generate more data points to get an idea of the climate change trend.

Figure 10 shows all of the climate change scenario runs for the Okanagan using 12 climate models from 1960 to 2100. This work was compiled by Denise Neilsen at the Agriculture and Agri-Food Canada – Summerland Research Station. There is a lot of scatter in this figure, but it is obvious that there is a trend of increasing water demand.

Running the three climate change models on three selected future years is not sufficient to provide a trend like in Figure 10. However, it illustrates that the future water demand can be as high as 15% more than the current demand.

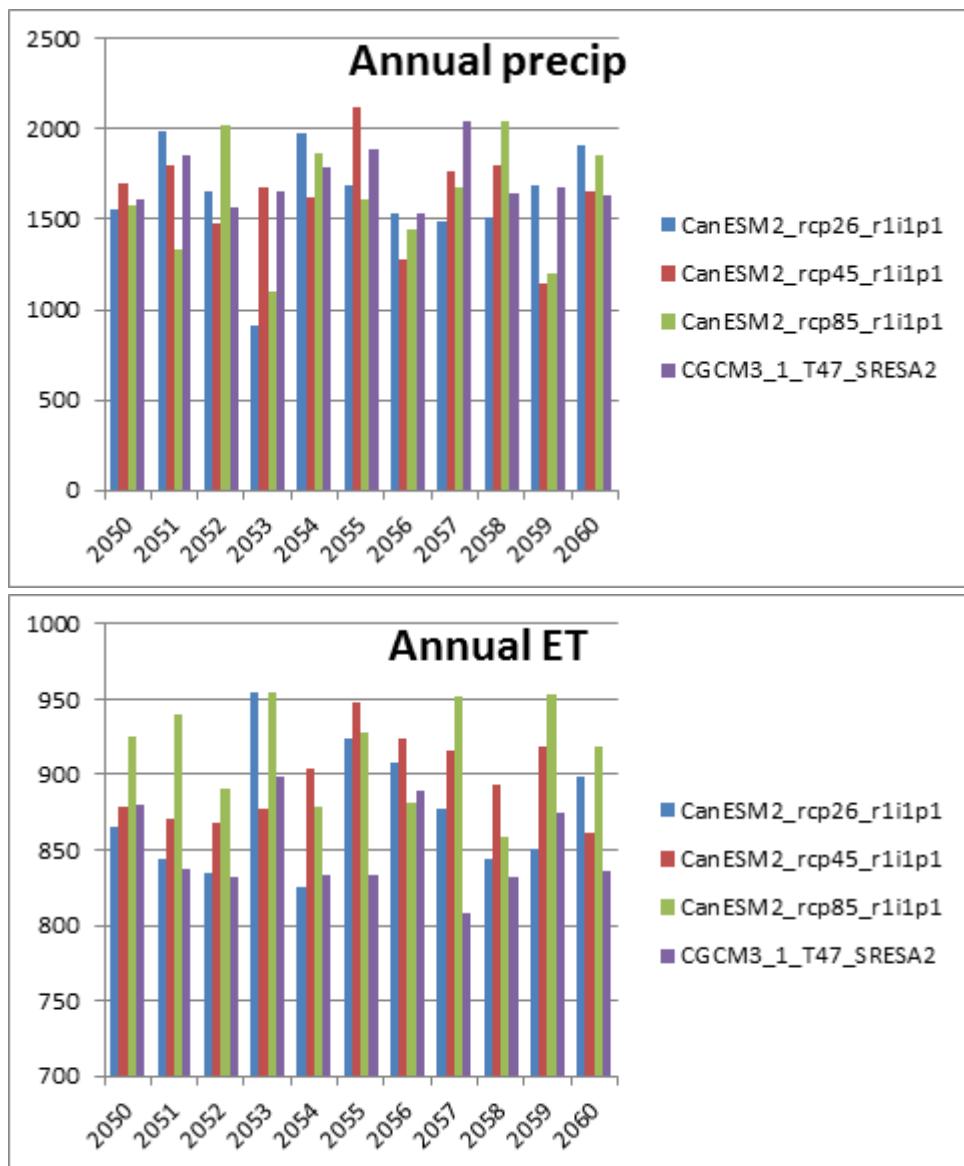


Figure 9 Annual ET and Effective Precipitation in 2050's

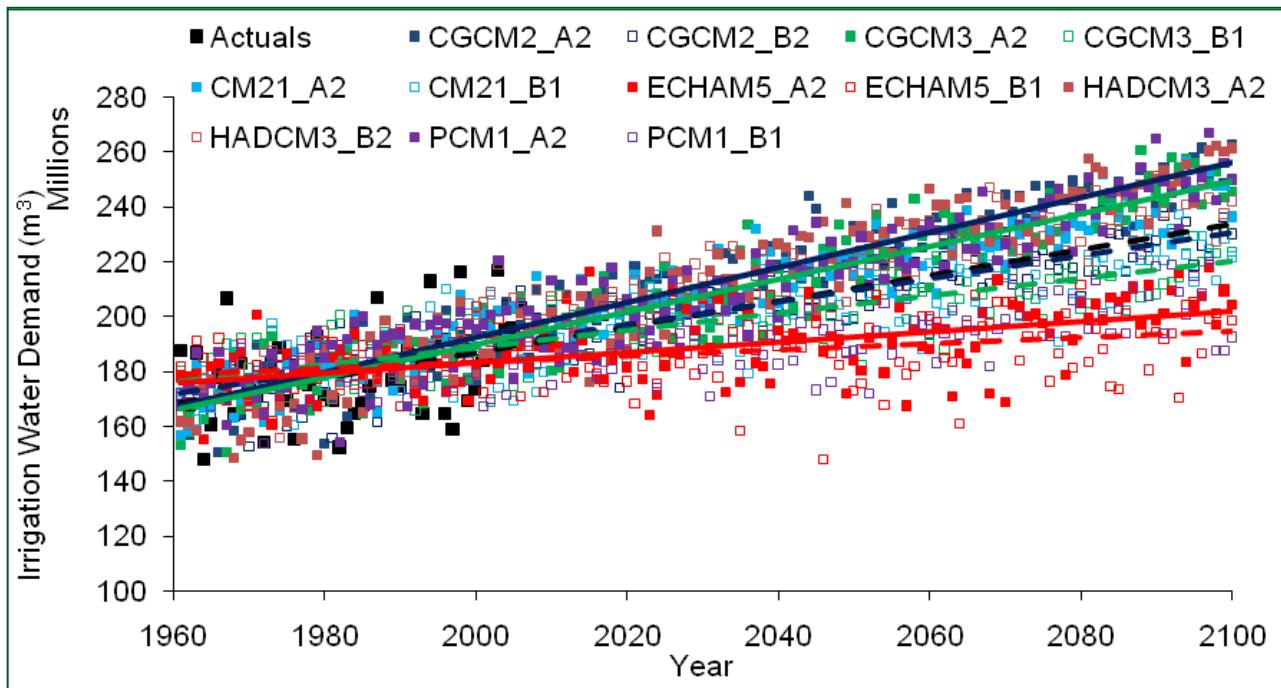


Figure 10 Future Irrigation Demand for All Outdoor Uses in the Okanagan in Response to Observed Climate Data (Actuals) and Future Climate Data Projected from a Range of Global Climate Models

Agricultural Buildout Crop Water Demand Using 2003 Climate Data – Table L

An agricultural buildout scenario was developed for estimating potential agricultural lands that could be irrigated in the future. The rules used to establish where potential additional agricultural lands were located in the SGI are as follows:

- within 1,000 m of water supply (lake)
- within 1,000 m of water supply (water course)
- within 1,000 m of water supply (wetland)
- within 1,000 m of high productivity aquifer
- within 1,000 m of water purveyor
- with Ag Capability class 1-4 only where available
- must be within the ALR
- must be private ownership
- below 125 m average elevation

For the areas that are determined to be eligible for future buildout, a crop and an irrigation system need to be applied. Where a crop already existed in the land use inventory, that crop would remain and an irrigation system assigned. If no crop existed, then a crop and an irrigation system are assigned as per the criteria below:

- **Forage crops:** 50% of buildout area with sprinkler irrigation
- **Pasture:** 10% of buildout area with sprinkler irrigation
- **Grapes:** 20% of buildout area with drip irrigation
- **Vegetables:** 20% of buildout area with drip irrigation

Figure 11 indicates the location of agricultural land that is currently irrigated (blue) and the land that can be potentially irrigated (red). Figures 12 to 14 are the enlarged view of the individual islands. Based on the scenario provided for SGI, the additional agricultural land that could be irrigated is 460 ha (81% increase). The water demand for a year like 2003 would be 3,501,459 m³ assuming efficient irrigation systems and good management.

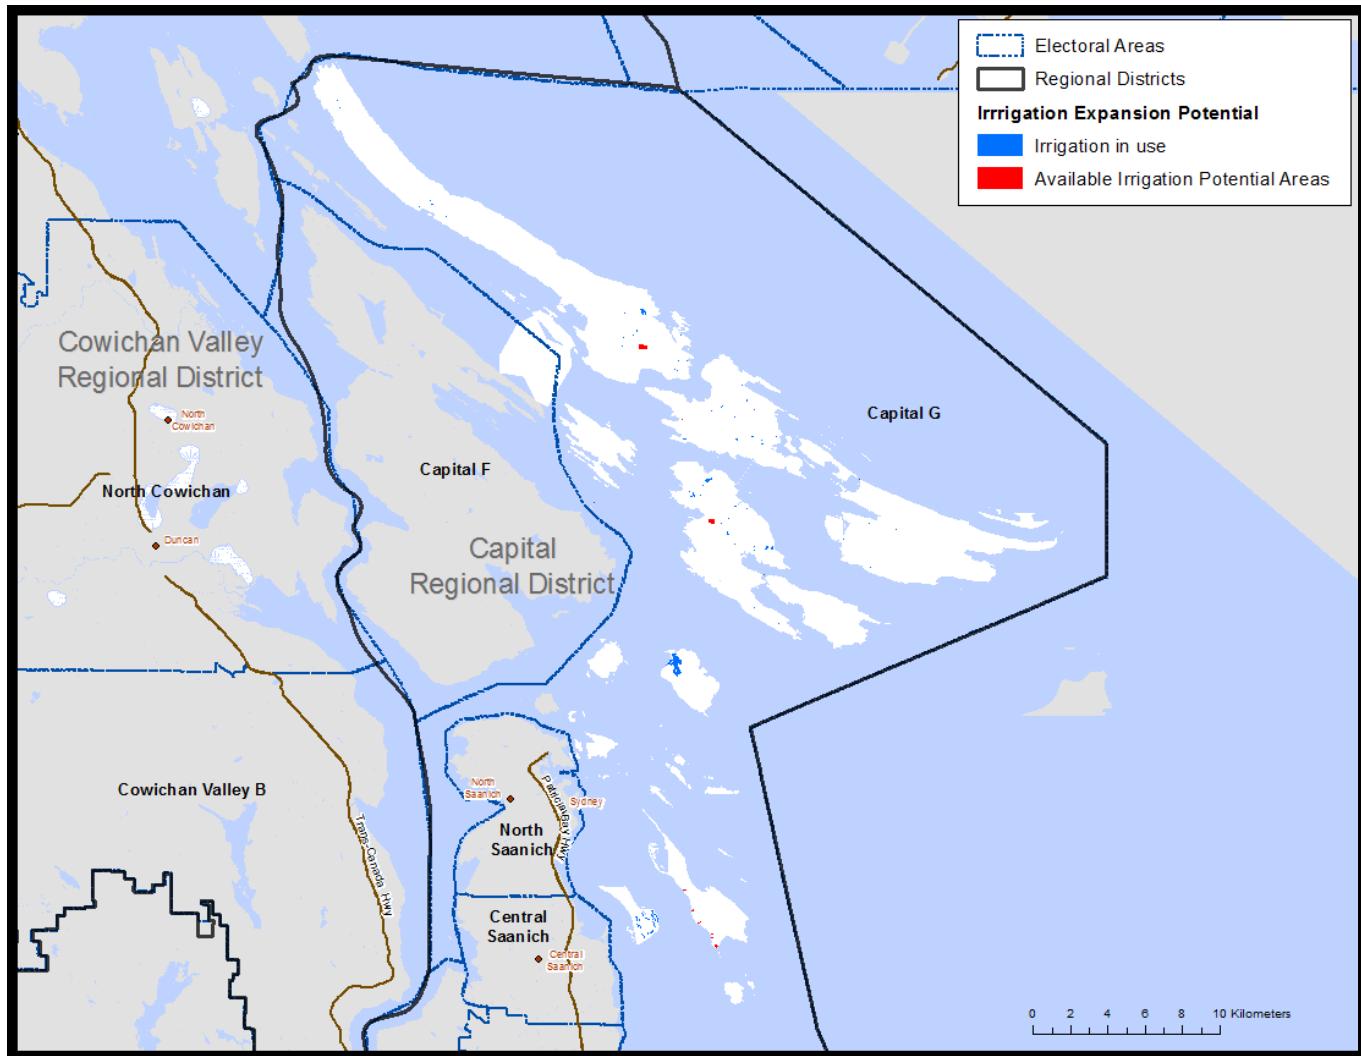


Figure 11 SGI Irrigation Expansion Potential

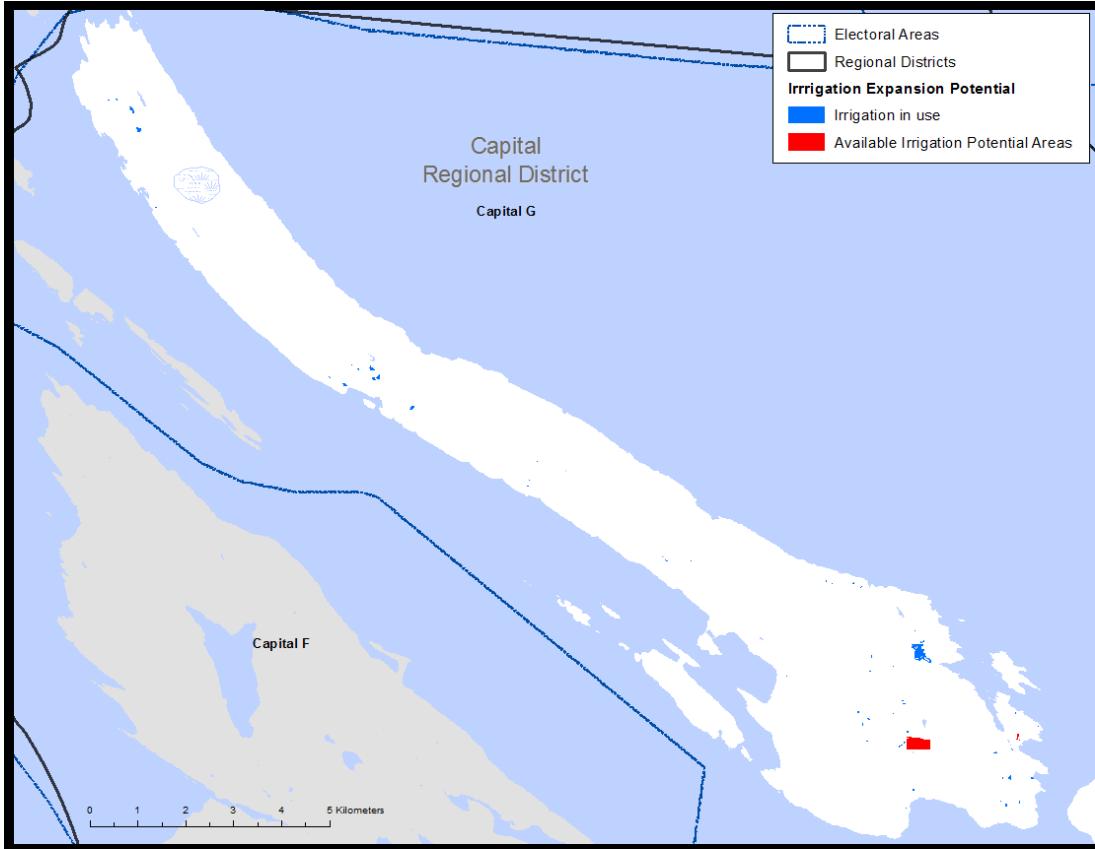


Figure 12 Galiano Island Irrigation Expansion Potential

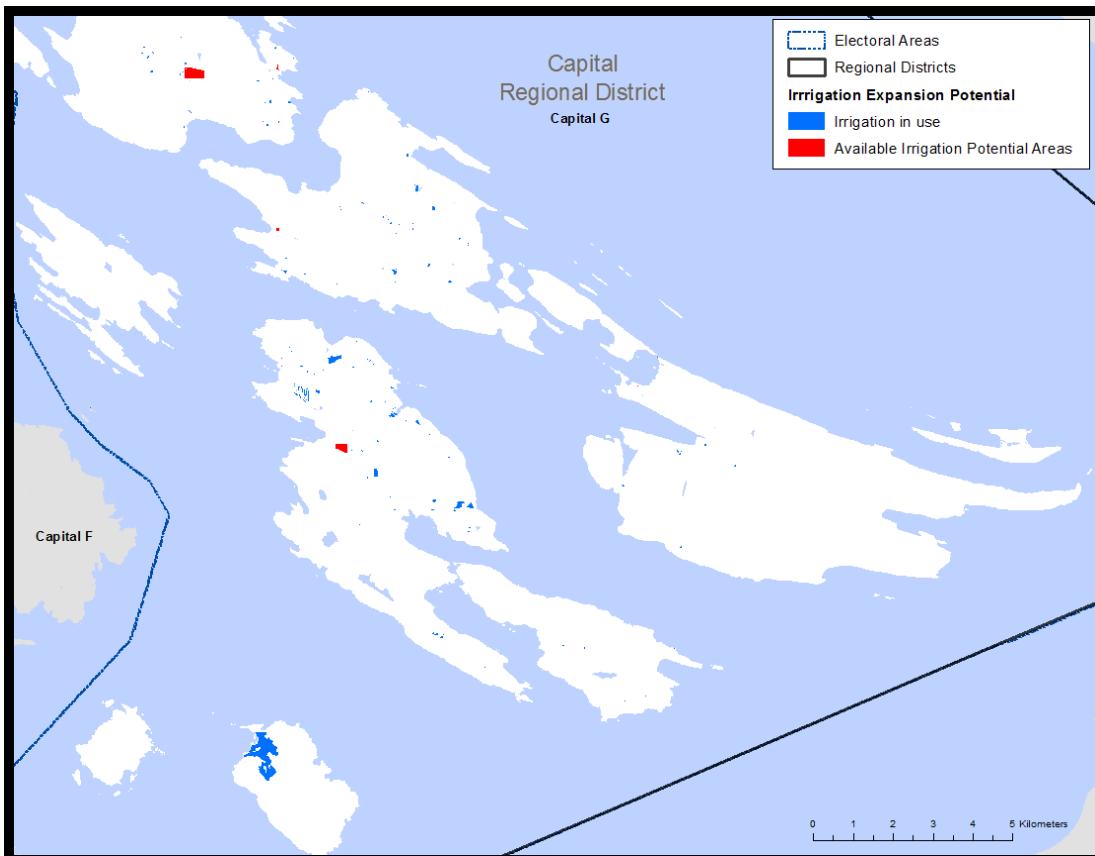


Figure 13 Pender, Mayne and Saturna Islands Irrigation Expansion Potential

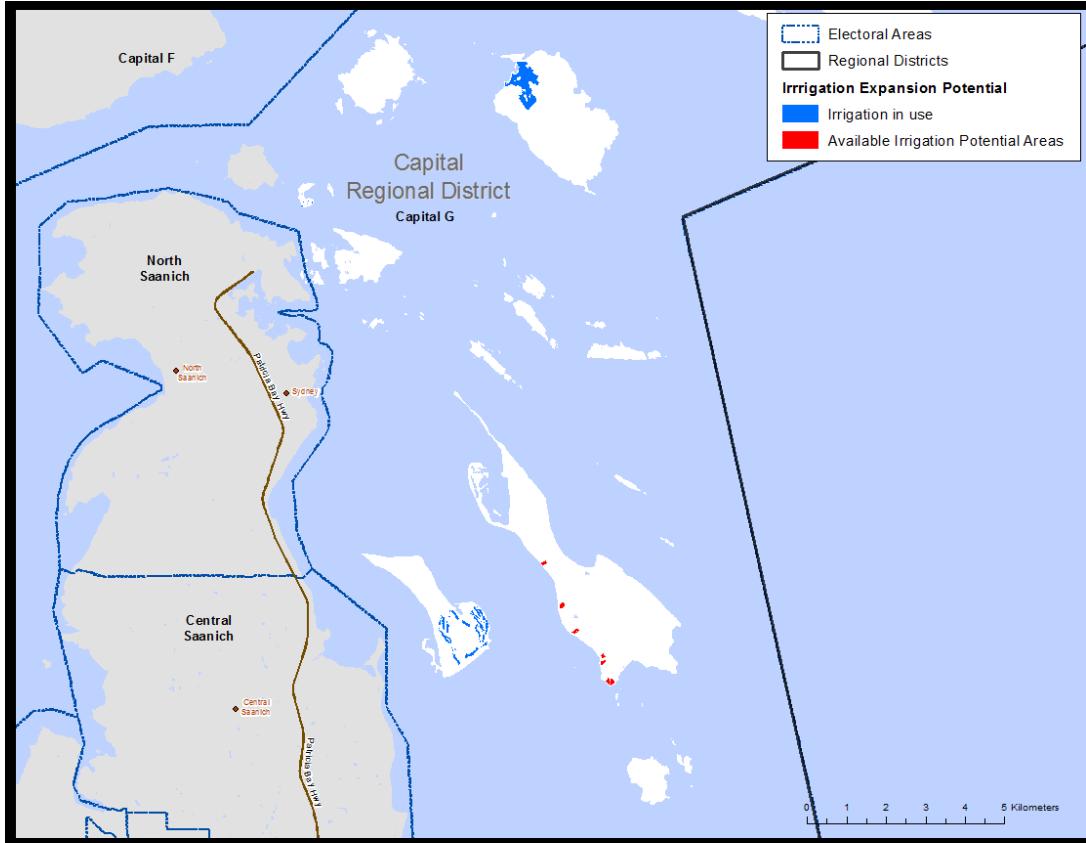


Figure 14 Small Islands Irrigation Expansion Potential

Agricultural Buildout Crop Water Demand for 2050 – Table M

The same irrigation expansion and cropping scenario used to generate the values in Table L were used to generate the climate change water demand shown in Table M. The same three climate change models were used. When climate change is added to the buildout scenario the water demand increases could increase to as high as 4,209,399 m³ in 2053 with access1-0-rcp85 model. Again more runs are required to develop a good trend with the climate change data. See discussion under Table K.

Irrigation Systems Used for the Buildout Scenario – Table N

Table N provides an account of the irrigation systems used by area for the buildout scenario in Table L. It takes into account the irrigation systems that were assigned in the buildout scenarios used.

Sub-Basin Water Demand for the Buildout Scenario – Table O

Table O provides an account of the water demand based on sub-basin for the buildout scenario in Table L. It can be compared with the values in Table E without buildout.

Literature

Cannon, A.J., and Whitfield, P.H. (2002), Synoptic map classification using recursive partitioning and principle component analysis. *Monthly Weather Rev.* 130:1187-1206.

Cannon, A.J. (2008), Probabilistic multi-site precipitation downscaling by an expanded Bernoulli-gamma density network. *Journal of Hydrometeorology*. <http://dx.doi.org/10.1175%2F2008JHM960.1>

Intergovernmental Panel on Climate Change (IPCC) (2008), Fourth Assessment Report –AR4. <http://www.ipcc.ch/ipccreports/ar4-syr.htm>

Neilson, D., Duke, G., Taylor, W., Byrne, J.M., and Van der Gulik T.W. (2010). Development and Verification of Daily Gridded Climate Surfaces in the Okanagan Basin of British Columbia. *Canadian Water Resources Journal* 35(2), pp. 131-154. <http://www4.agr.gc.ca/abstract-resume/abstract-resume.htm?lang=eng&id=21183000000448>

Allen, R. G., Pereira, L. S., Raes, D. and Smith, M. (1998). Crop evapotranspiration Guidelines for computing crop water requirements. FAO Irrigation and Drainage Paper 56. United Nations Food and Agriculture Organization. Rome. 100pp

Appendix Tables

Appendix Table A 2003 Water Demand by Crop with Average Management

Appendix Table B 1997 Water Demand by Crop with Average Management

Appendix Table C 2003 Water Demand by Irrigation System with Average Management

Appendix Table D 2003 Water Demand by Soil Texture with Average Management

Appendix Table E 2003 Water Demand by Sub-Basin with Average Management

Appendix Table F 2003 Management Comparison on Irrigation Demand and Percolation Volumes

Appendix Table G 2003 Percolation Volumes by Irrigation System with Average Management

Appendix Table H 2003 Crop Water Demand for Improved Irrigation System Efficiency and Good Management

Appendix Table I 2003 Water Demand for Frost Protection, Harvesting and Other Use with Average Management

Appendix Table J 2003 Water Demand by Animal Type with Average Management

Appendix Table K Climate Change Water Demand Circa 2050 for a High Demand Year with Good Management using Current Crops and Irrigation Systems

Appendix Table L Buildout Crop Water Demand for 2003 Climate Data and Good Management

Appendix Table M Buildout Crop Water Demand for Climate Change Circa 2050 and Good Management

Appendix Table N Buildout Irrigation System Demand for 2003 Climate Data and Good Management

Appendix Table O Buildout Water Demand by Sub-Basin for 2003 Climate Data and Good Management

Appendix Table A 2003 Water Demand by Crop with Average Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total		
Agriculture Crop Group	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Apple	-	-	-	-	-	-	1.1	7,321	695	1.1	7,321	695
Berry	-	-	-	-	-	-	0.7	2,654	403	0.7	2,654	403
Blueberry	0.5	2,586	489	-	-	-	0.6	2,793	492	1.1	5,379	491
Cranberry	-	-	-	-	-	-	0.1	1,101	1,801	0.1	1,101	1,801
Forage	-	-	-	-	-	-	41.4	429,843	1,038	41.4	429,843	1,038
Golf	8.7	75,626	865	-	-	-	26.6	241,993	910	35.3	317,619	899
Grape	2.6	9,053	346	-	-	-	3.8	12,890	343	6.4	21,943	344
Greenhouse	0.3	2,781	1,021	-	-	-	0.9	9,198	1,026	1.2	11,979	1,027
Nursery	-	-	-	-	-	-	1.1	5,019	547	1.1	5,019	547
Sweetcorn	-	-	-	-	-	-	0.1	518	396	0.1	518	396
Vegetable	1.9	11,003	591	-	-	-	18.3	110,429	605	20.1	121,432	604
TOTALS	14.0	101,048	721	-	-	-	94.5	823,775	872	108.5	924,823	853

Appendix Table B 1997 Water Demand by Crop with Average Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total		
Agriculture Crop Group	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Apple	-	-	-	-	-	-	1.1	3,469	329	1.1	3,469	329
Berry	-	-	-	-	-	-	0.7	959	146	0.7	959	146
Blueberry	0.5	1,161	219	-	-	-	0.6	1,228	216	1.1	2,389	218
Cranberry	-	-	-	-	-	-	0.1	567	927	0.1	567	927
Forage	-	-	-	-	-	-	41.4	216,232	522	41.4	216,232	522
Golf	8.7	43,601	499	-	-	-	26.6	141,175	531	35.3	184,776	523
Grape	2.6	2,248	86	-	-	-	3.8	3,087	82	6.4	5,335	84
Greenhouse	0.3	2,648	972	-	-	-	0.9	8,769	976	1.2	11,417	977
Nursery	-	-	-	-	-	-	1.1	2,053	262	1.1	2,053	262
Sweetcorn	-	-	-	-	-	-	0.1	190	145	0.1	190	145
Vegetable	1.9	5,577	300	-	-	-	18.3	55,798	306	20.1	61,375	305
TOTALS	14.0	55,236	394	-	-	-	94.5	433,542	459	108.5	488,778	451

Appendix Table C 2003 Water Demand by Irrigation System with Average Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total		
Agriculture Irrigation System	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Drip	1.0	5,767	603	-	-	-	3.6	19,753	552	4.5	25,519	563
Flood	-	-	-	-	-	-	0.1	1,101	1,801	0.1	1,101	1,801
Goldsprinkler	8.7	75,626	865	-	-	-	26.6	241,993	910	35.3	317,619	899
Microsprinkler	0.1	407	798	-	-	-	0.1	957	795	0.2	1,364	796
Overtreedrip	2.6	9,053	346	-	-	-	4.1	14,812	365	6.7	23,864	357
SDI	-	-	-	-	-	-	0.5	2,445	446	0.5	2,445	446
Sprinkler	1.6	10,195	621	-	-	-	59.4	542,101	913	61.0	552,296	905
Ssovertree	-	-	-	-	-	-	0.1	599	643	0.1	599	643
TOTALS	14.0	101,048	721	-	-	-	94.5	823,760	872	108.5	924,808	853

Appendix Table D 2003 Water Demand by Soil Texture with Average Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total		
Agriculture Soil Texture	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Cultured Medium	0.3	2,780	1,066	-	-	-	1.1	10,975	969	1.4	13,755	987
Peat	-	-	-	-	-	-	0.1	1,101	1,801	0.1	1,101	1,801
Sandy Loam (defaulted)	13.8	98,267	714	-	-	-	93.3	811,685	870	107.0	909,952	850
TOTALS	14.0	101,048	721	-	-	-	94.5	823,760	872	108.5	924,808	853

Appendix Table E 2003 Water Demand by Sub-Basin with Average Management													
Water Source		Surface Water			Reclaimed Water			Groundwater			Total		
Agriculture Sub-Basin	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	
Finlay Brook	7.7	64,334	834	-	-	-	7.7	45,392	593	15.4	109,726	713	
Greenburn Creek	0.1	375	640	-	-	-	0.4	4,173	968	0.5	4,548	928	
Lyall Creek	0.5	3,287	693	-	-	-	0.3	2,077	634	0.8	5,364	669	
East of Gulf Is.	5.8	33,052	573	-	-	-	86.0	772,118	897	91.8	805,170	877	
TOTALS	14.0	101,048	721	-	-	-	94.5	823,760	872	108.5	924,808	853	

Appendix Table F 2003 Management Comparison on Irrigation Demand and Percolation Volumes																	
Water Source	Surface Water				Reclaimed Water				Groundwater				Total				
Agriculture Management	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Deep Percolation (m³)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Deep Percolation (m³)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Deep Percolation (m³)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Deep Percolation (m³)	Percolation (m³/ha)
Poor	14.0	103,307	737	21,169	-	-	-	-	94.5	843,144	893	178,476	108.5	946,451	873	199,645	1,840
Avg	14.0	101,048	721	18,910	-	-	-	-	94.5	823,775	872	159,107	108.5	924,823	853	178,017	1,641
Good	14.0	98,789	705	16,651	-	-	-	-	94.5	804,406	852	139,738	108.5	903,195	833	156,389	1,441

Appendix Table G 2003 Percolation Volumes by Irrigation System with Average Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total			
	Agriculture Irrigation System	Irrigated Area (ha)	Irrigation Demand (m ³)	Deep Percolation (m ³)	Irrigated Area (ha)	Irrigation Demand (m ³)	Deep Percolation (m ³)	Irrigated Area (ha)	Irrigation Demand (m ³)	Deep Percolation (m ³)	Irrigated Area (ha)	Irrigation Demand (m ³)	Deep Percolation (m ³)
Drip	1.0	5,767	825	-	-	-	3.6	19,753	2,925	4.5	25,519	3,750	833
Flood	-	-	-	-	-	-	0.1	1,101	251	0.1	1,101	251	2,510
Golfsprinkler	8.7	75,626	16,076	-	-	-	26.6	241,993	51,478	35.3	317,619	67,553	1,914
Microsprinkler	0.1	407	99	-	-	-	0.1	957	232	0.2	1,364	331	1,655
Overtreedrip	2.6	9,053	522	-	-	-	4.1	14,812	908	6.7	23,864	1,430	213
SDI	-	-	-	-	-	-	0.5	2,445	244	0.5	2,445	244	488
Sprinkler	1.6	10,195	1,388	-	-	-	59.4	542,101	102,984	61.0	552,296	104,372	1,711
Ssovertree	-	-	-	-	-	-	0.1	599	85	0.1	599	85	850
TOTALS	14.0	101,048	18,910	-	-	-	94.5	823,760	159,107	108.5	924,808	178,017	1,641

Appendix Table H 2003 Crop Water Demand for Improved Irrigation System Efficiency and Good Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total			
	Agriculture Crop Group	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Apple	-	-	-	-	-	-	-	1.1	4,962	471	1.1	4,962	471
Berry	-	-	-	-	-	-	-	0.7	2,538	386	0.7	2,538	386
Blueberry	0.5	2,533	479	-	-	-	-	0.6	3,569	629	1.1	6,101	557
Cranberry	-	-	-	-	-	-	-	0.1	1,101	1,801	0.1	1,101	1,801
Forage	-	-	-	-	-	-	-	41.4	350,446	846	41.4	350,446	846
Golf	8.7	74,165	848	-	-	-	-	26.6	237,313	893	35.3	311,478	882
Grape	2.6	6,686	255	-	-	-	-	3.8	9,565	254	6.4	16,251	255
Greenhouse	0.3	2,736	992	-	-	-	-	0.9	9,094	1,005	1.2	11,830	1,006
Nursery	-	-	-	-	-	-	-	1.1	4,016	701	1.1	4,016	701
Sweetcorn	-	-	-	-	-	-	-	0.1	508	388	0.1	508	388
Vegetable	1.9	6,641	357	-	-	-	-	18.3	65,667	360	20.1	72,308	359
TOTALS	14.0	92,761	662	-	-	-	-	94.5	688,779	729	108.5	781,540	721

Appendix Table I 2003 Water Demand for Frost Protection, Harvesting and Other Use with Average Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total			
	Agriculture Crop Group	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Cranberry Harvesting	-	-	-	-	-	-	-	0.1	15	25	0.1	15	25
Greenhouse Cucumber	-	-	-	-	-	-	-	0.1	592	1,042	0.1	592	1,042
Greenhouse Flower	0.1	407	798	-	-	-	-	0.1	957	795	0.2	1,364	796
Greenhouse Pepper	0.1	1,017	963	-	-	-	-	0.5	4,591	994	0.6	5,608	988
Greenhouse Tomato	0.1	1,357	1,303	-	-	-	-	0.2	3,058	1,274	0.3	4,415	1,283
Nursery Pot	-	-	-	-	-	-	-	0.3	1,776	701	0.3	1,776	701
TOTALS	0.3	2,780	1,066	-	-	-	-	1.2	10,990	921	1.5	13,770	947

Appendix Table J 2003 Water Demand by Animal Type	
Animal Type	Demand (m³)
Beef	6,880
Goats	423
Horses	4,289
Poultry - broiler	95
Poultry - laying	50
Sheep	15,736
Swine	712
TOTALS	28,185

Appendix Table K Climate Change Water Demand Circa 2050 for High Demand Year with Good Management Using Current Crops and Irrigation Systems												
Water Source	access1-0-rcp85			canesm2-rcp85			cnrm-cm5-rcp45			Average		
Year	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
2053	108.5	1,066,199	983	108.5	671,378	619	108.5	722,512	666	108.5	820,030	756
2056	108.5	991,983	915	108.5	987,929	911	108.5	563,009	519	108.5	847,640	782
2059	108.5	960,799	886	108.5	735,259	678	108.5	768,803	709	108.5	821,620	758
AVERAGE	108.5	1,006,327	928	108.5	798,189	736	108.5	684,775	631	108.5	829,763	765

Appendix Table L Buildout Crop Water Demand for 2003 Climate Data with Good Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total		
Agriculture Crop Group	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Apple	-	-	-	-	-	-	1.1	4,962	471	1.1	4,962	471
Berry	-	-	-	-	-	-	0.7	2,538	386	0.7	2,538	386
Blueberry	0.5	2,533	479	-	-	-	0.6	3,569	629	1.1	6,101	557
Cranberry	-	-	-	-	-	-	0.1	1,101	1,801	0.1	1,101	1,801
Forage	198.5	1,666,542	840	-	-	-	41.4	350,446	846	239.9	2,016,988	841
Golf	8.7	74,165	848	-	-	-	26.6	237,313	893	35.3	311,478	882
Grape	106.9	266,565	249	-	-	-	21.4	53,723	251	128.3	320,288	250
Greenhouse	0.3	2,736	992	-	-	-	0.9	9,094	1,005	1.2	11,830	1,006
Nursery	-	-	-	-	-	-	1.1	4,016	487	1.1	4,016	487
Pasture/Grass	82.1	547,141	666	-	-	-	-	-	-	82.1	547,141	666
Sweetcorn	-	-	-	-	-	-	0.1	508	388	0.1	508	388
Vegetable	58.9	208,825	354	-	-	-	18.3	65,667	360	77.2	274,492	356
TOTALS	456.0	2,768,507	607	-	-	-	112.1	732,952	654	568.1	3,501,459	616

Appendix Table M Buildout Crop Water Demand for Climate Change Circa 2050 and Good Management

Water Source	access1-0-rcp85			canesm2-rcp85			cnrm-cm5-rcp45			Average		
Year	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
2053	568.1	4,209,399	741	568.1	4,350,356	766	568.1	2,659,106	468	568.1	3,739,620	658
2056	568.1	3,873,327	682	568.1	2,729,416	480	568.1	1,994,493	351	568.1	2,865,745	504
2059	568.1	3,614,816	636	568.1	4,326,920	762	568.1	2,605,080	459	568.1	3,515,605	619
AVERAGE	568.1	3,899,181	686	568.1	3,802,231	669	568.1	2,419,560	426	568.1	3,373,657	594

Appendix Table N Buildout Irrigation System Demand for 2003 Climate Data and Good Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total			
	Agriculture Irrigation System	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Drip	166.6	480,659	289	-	-	-	-	43.4	139,808	322	209.9	620,467	296
Flood	-	-	-	-	-	-	-	0.1	1,101	1,801	0.1	1,101	1,801
Golfsprinkler	8.7	74,165	848	-	-	-	-	26.6	237,313	893	35.3	311,478	882
PivotLP	131.0	963,846	736	-	-	-	-	31.9	260,752	817	162.9	1,224,598	752
SDI	-	-	-	-	-	-	-	0.1	234	338	0.1	234	338
Sprinkler	149.6	1,249,837	835	-	-	-	-	10.1	93,729	925	159.8	1,343,566	841
TOTALS	456.0	2,768,507	607	-	-	-	-	112.1	732,937	654	568.1	3,501,444	616

Appendix Table O Buildout Water Demand by Sub-Basin for 2003 Climate Data and Good Management

Water Source	Surface Water			Reclaimed Water			Groundwater			Total			
	Agriculture Sub-Basin	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)	Irrigated Area (ha)	Irrigation Demand (m³)	Avg. Req. (mm)
Finlay Brook	159.7	1,025,146	642	-	-	-	-	7.7	28,593	373	167.4	1,053,739	630
Greenburn Creek	7.4	37,116	503	-	-	-	-	0.4	3,718	862	7.8	40,833	523
Lyall Creek	73.8	284,976	386	-	-	-	-	18.0	45,445	253	91.8	330,421	360
East of Gulf Is.	215.1	1,421,269	661	-	-	-	-	86.0	655,181	762	301.1	2,076,451	690
TOTALS	456.0	2,768,507	607	-	-	-	-	112.1	732,937	654	568.1	3,501,444	616